



Saving fuel, saving costs

Impacts and reduction potential for
corporate fleets

Report prepared for:
Greenpeace

Report
Delft, April 2015

Author(s):
Sanne Aarnink
Huib van Essen
Arno Schroten
Matthijs Otten



Publication Data

Bibliographical data:

Sanne Aarnink, Huib van Essen, Arno Schroten, Matthijs Otten

Saving fuel, saving costs

Impacts and reduction potential for corporate fleets

Delft, CE Delft, April 2015

Carbon dioxide / Standards / Vehicles / Freight transport / Market / Industry / Policy /

Decision-making

FT : Options

Publication code: 15.4E62.23

CE publications are available from www.cedelft.eu

Commissioned by: Greenpeace

Further information on this study can be obtained from the contact person, Huib van Essen.

© copyright, CE Delft, Delft

CE Delft

Committed to the Environment

Through its independent research and consultancy work CE Delft is helping build a sustainable world. In the fields of energy, transport and resources our expertise is leading-edge. With our wealth of know-how on technologies, policies and economic issues we support government agencies, NGOs and industries in pursuit of structural change. For 35 years now, the skills and enthusiasm of CE Delft's staff have been devoted to achieving this mission.



Executive summary

This report provides a comprehensive overview of how corporate fleets contribute to global oil consumption and greenhouse gas emissions. It also describes the wide range of practical solutions available to reduce the fuel use and emissions of both passenger and freight fleets. The study shows that there is a large potential of options for reducing fuel use, many with a payback time of several years.

Our reliance on oil is expensive and environmentally damaging

Global oil consumption is causing serious environmental problems, including air pollution and climate change. The hunt for new oil reserves is threatening to destroy sensitive areas of international importance like the Arctic. And our reliance on oil is creating economies that are dependent on foreign oil imports and vulnerable to fluctuating oil prices.

Transport represents 64% of global oil demand. As a result, the sector is responsible for a large share - 23% - of global greenhouse gas (GHG) emissions. In the EU this share is lower (20%); in the US and Canada it is higher (28%). Transport emissions are dominated by road transport.

Almost half of domestic transport emissions are from corporate fleets

A large proportion of a country's road transport fleet will be made up of company vehicles, and a high percentage of new vehicle sales will be for corporate use. In the EU nearly all heavy goods vehicles (HGVs), most light commercial vehicles (LCVs) and about half of all new passenger cars are purchased by companies or other fleet owners.

These vehicles use a vast amount of fuel. Corporate fleets (company cars + HGVs + LCVs) in Europe spend nearly € 200 billion on fuel every year. The Total Cost of Ownership (TCO) is about € 600 billion per year.

In all, the EU's entire corporate fleet is responsible for approximately 45% of emissions from road transport, and therefore 8% of total EU GHG emissions. Company cars are often sold on to private buyers after a few years and remain on the road for many more, so the influence of the corporate fleet on emissions is greater than these figures suggest.

Cleaner corporate passenger fleets can significantly reduce costs

Many companies are searching for ways to bring down fuel use in order to save money and reduce environmental impact. Cutting fuel consumption means lower GHG emissions and less demand for oil. This in turn makes the extraction of alternative, controversial crude - from tar sands or the Arctic, for example - less profitable. Solutions to save fuel include:

- **Choosing more fuel efficient conventional cars.** This has a significant potential for reducing GHG emissions against low or often even negative costs. Furthermore, choosing low resistance tyres for all cars is also a cost effective measure that saves fuel and money.
- **Adopting alternative powertrains,** like full electric or plug-in hybrid cars, can reduce emissions even further. Investment costs are significantly higher, but are often offset by tax benefits or subsidies. In some countries, for vehicles with sufficiently high mileages, the total fuel savings are earned back within the vehicle's lifetime. Unlike full electric, the driving



range of plug-in hybrids is not limited by battery capacity. They require additional arrangements to make sure that drivers charge as often as possible which is needed for harvesting the full fuel saving potential.

- Measures encouraging **fuel efficient driving** behaviour can also be effective. As well as offering initial eco-driving courses to employees, it is essential to follow-up with monitoring, feedback and additional incentives, like a competition or financial bonus/malus scheme. Such an approach can improve fuel efficiency from 2 to more than 20% per year. Alongside saving fuel, eco-driving can also bring down accident rates and maintenance costs.
- **Teleworking and teleconferencing** can save significant amounts of time and money spent on travel. Teleworking for one day a week reduces CO₂ emissions by an average of 14% and can save € 2,000 per employee per year. A **modal shift** from cars to alternative transport modes in business and commuting travel can be stimulated in various ways, including financial incentives and travel card schemes. For example, offering multimodal business travel cards to employees can reduce company car kilometres by 7%.

Freight fleets can be cleaner, more efficient and cost less

There are many ways to reduce the fuel consumption and emissions of HGVs and LCVs. Just as for cars, using less petrol and diesel will save a company money and reduce its environmental impact. Solutions include:

- Choosing the most **fuel efficient conventional vehicle**. In addition, **retrofitting vehicles**, particularly trucks, can make them much more efficient. Emissions from HGVs can be reduced by 1-4% with a single measure to improve aerodynamics, by combining measures much higher reductions can be achieved and many measures have a relatively short payback time.
- Purchasing **alternative powertrains** can reduce emissions even further. The first full electric and plug-in hybrid trucks have entered the market and electric vans are also available. Emissions from HGVs can be reduced by 8-30% with full hybridisation. Purchase costs are much higher than for conventional vehicles but, with significant reductions in fuel costs and subsidies in some countries, the difference in the TCO is decreasing and in some cases becoming (close to) competitive. Other alternatives are CNG or LNG drivetrains, which usually have lower investment costs but also lower emissions reduction potential (up to 20%).
- **Eco-driving programmes** can again have a significant impact for freight vehicles. This kind of behaviour change can produce immediate fuel savings of up to 20% and long-term savings of 5-7%. Monitoring and feedback to drivers is crucial to maintain the positive effects. Various co-benefits can be expected, including lower accident rates and maintenance costs.

Reducing freight vehicle kilometres can also contribute to lower GHG emissions. This can be done by **modal shift or increasing the logistical efficiency**. Real world examples show that improved logistical efficiency can reduce emissions by 4-20%. A shift to alternative transport modes (inland navigation or rail transport) can have even much higher GHG reduction potentials, but these are very case specific.



Contents

	Contents	5
1	Introduction	7
1.1	Background	7
1.2	Objectives and scope of the project	8
1.3	Approach	8
1.4	Outline of the report	8
2	Greenhouse Gas Emissions and Costs of Corporate Fleets	9
2.1	Introduction	9
2.2	Contribution of transport to climate change	9
2.3	Contribution of corporate fleets to climate change	12
2.4	Costs of corporate fleets and their fuel use	13
3	Potential for Reducing Oil Consumption of Corporate Fleets	15
3.1	Introduction	15
3.2	Passenger transport	16
3.3	Freight transport	25
	References	39
Annex A	Estimations company cars in the EU28	47
Annex B	Overview and explanation of technical measures for freight transport vehicles	49





1 Introduction

1.1 Background

Transport represents a relatively high share of global oil demand. This poses a threat to sensitive areas like the Arctic and causes serious environmental problems such as air pollution and global warming.

Anthropogenic GreenHouse Gas (GHG) emissions currently cause global warming of approximately 1 °C compared to the pre-industrial level, warming that is expected to increase to 2-4 °C in 2100 depending on the chosen reduction scenario (IPCC, 2014a). Politicians aim to limit the global temperature increase to 2 °C to prevent dangerous climate change. In order to reach this goal, each country and every economic sector will have to drastically reduce its GHG emissions.

The combustion of fossil fuels (oil, coal and gas) is the main contributor to global warming, in which emissions from oil consumption make up the largest share in the EU28 and USA/Canada (IPCC, 2014a; IEA, 2014a). The demand for crude oil and oil products has grown significantly over the last decades, mainly because of growing transport volumes and the dependency of transport on oil products (IEA, 2014b). Consequently, the transport sector now produces 23% of global GHG emissions (IEA, 2014a) and, therefore, the sector has an important role to play in reducing them.

Company cars and road freight transport are responsible for a large share of the transport sector's oil consumption and emissions (SULTAN, 2012; EPA, 2014; Environment Canada, 2014). The direct impacts of the fuel used by company fleets is significant. In addition, a significant proportion of new vehicle sales are company cars, which has a large impact on new vehicle technologies and the fuel efficiency of future private fleets, affecting emissions in the longer term.

Many companies are searching for options to reduce the fuel consumption of their fleets and wider transport operations, in order to bring down costs and reduce environmental impact. This reduces GHG emissions and so is a positive development for climate change. It also reduces the demand for crude oil, making the extraction of alternative oil¹, e.g. from tar sands or sensitive areas like the Arctic, less profitable. The main reason for developed countries, such as the USA and Canada, to extract oil from such alternative oil sources is to reduce their dependence on other (unstable) countries for their crude oil supply. However, as became visible again recently, a lower demand for oil results in oversupply and lower oil prices. The counter side of low oil prices is an increase in the cost hurdle for a transition to alternative, low carbon energy sources (IPCC, 2014b).

In this context Greenpeace commissioned CE Delft to conduct an independent study on the potential and costs of reducing oil consumption (and therefore emissions) of corporate fleets.

¹ Sometimes referred to as 'extreme oils'.



1.2 Objectives and scope of the project

The overall objective of the study is to show what action can be taken by corporate fleet operators with the aim of greening fleets and reducing costs. In order to do so, the specific objectives of this study are to:

- explore the contribution of corporate fleets to worldwide oil consumption and GHG emissions, and the Total Costs of Ownership (TCO) - fuel costs in particular - of corporate fleets;
- summarise available (groups of) measures which fleet owners can adopt to reduce the fuel consumption of **passenger transport** (company car fleets in particular) and **freight transport** (van and truck fleets in particular), including the reduction potential, monetary savings, and other benefits of these measures.

As there are significant differences between regions and transport modes when considering the specific objectives mentioned above, the scope is mainly limited to:

- **The EU28 and partly to the USA and Canada.** However, the second chapter, which provides a background on emissions from transport and corporate fleets, also covers the rest of the world.
- **Passenger cars, Light Commercial Vehicles (LCVs) and Heavy Goods Vehicles (HGVs).** Buses, motorcycles, rail transport, inland navigation, aviation and maritime shipping are also included, except in Chapter 2.

1.3 Approach

For this study, an extensive literature review has been conducted.

The collected evidence is based on recent and fact-based sources, such as:

- Databases and reports from the International Energy Agency (IEA).
- Databases from the European Environment Agency (EEA) and from the EU GHG transport: Routes from 2050 project (e.g. SULTAN).
- National GHG inventories and other studies/data from the European Commission, EPA, and Environment Canada.
- Reports from independent research organisations, such as Ricardo-AEA, TNO, the International Panel on Climate Change (IPCC) and CE Delft.
- Company data (for case studies throughout the report). The inclusion of case studies ensures that literature findings, especially as regards the reduction potential and costs of measures, are in line with real-world experiences.

CE Delft is an independent research and consultancy company, and this is an independent study.

1.4 Outline of the report

The remainder of this report is structured around the specific objectives outlined in Section 1.2. In Chapter 2 the contribution of (road) transport, and corporate fleets in particular, to oil consumption and GHG emissions is explored. This chapter also provides cost estimates of corporate fleets and their fuel use. The measures that fleet owners can take to reduce fuel costs and emissions are described in Chapter 3. This is done for both corporate passenger and freight transport.



2 Greenhouse Gas Emissions and Costs of Corporate Fleets


2.1 Introduction

In this chapter background information on the GHG emissions resulting from transport is provided in Section 2.2. Then Section 2.3 highlights the contribution of corporate fleets to these transport GHG emissions and provides figures on the total (fuel) costs of corporate fleets.

2.2 Contribution of transport to climate change

Several human activities are causing anthropogenic GHG emissions. The majority of these GHG emissions are CO₂ emissions, which mainly result from fossil fuel combustion (i.e. burning coal, gas and oil), industrial processes (combined 65%) and from deforestation (11%) (IPCC, 2014a). The remainder of the emitted GHGs (24%) comprise of non-CO₂ emissions: fluorinated gases (F-gases), methane (CH₄) and nitrous oxide (N₂O), which mainly result from industrial processes and agricultural activities, for example due to the use of fertilisers (IEA, 2014a). Together, human activities caused global GHG emissions of 49 Gt CO₂ equivalent (CO₂ eq.) in 2010 (IPCC, 2014a).

Figure 1 Types of anthropogenic GHG emissions and their shares in 2010 global emissions

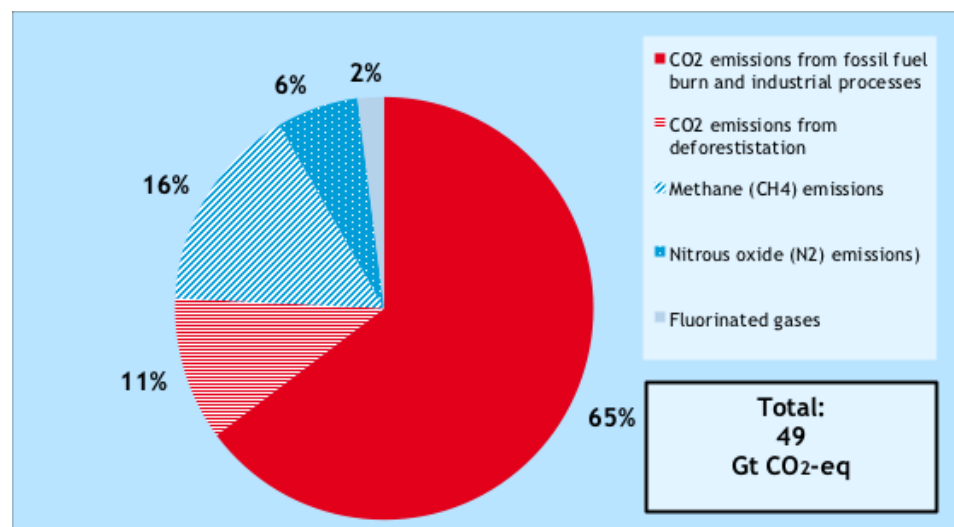


Source: IPCC, 2014a.

When allocating the total anthropogenic GHG emissions to different economic sectors, it becomes clear that global energy use is the main contributor (69% of global emissions, mainly consisting of CO₂), of which energy used by transport is responsible for about one third (33%) of global energy-related GHG emissions (see Figure 2).



Figure 2 also shows that the proportion of emissions resulting from different sectors varies between countries and regions. This is caused by differences in economies, energy sources used, and so on. However, both in the European Union and in North America, total energy use causes the majority of GHG emissions: 80% in the EU28 and 85% in the US. Transport uses a significant amount of fossil fuel energy and so also produces significant emissions. The energy used for transport causes 20% of total GHG emissions in the EU, and 28% in Canada and the USA.

Figure 2 Share of economic sectors in GHG emissions in different regions in 2012

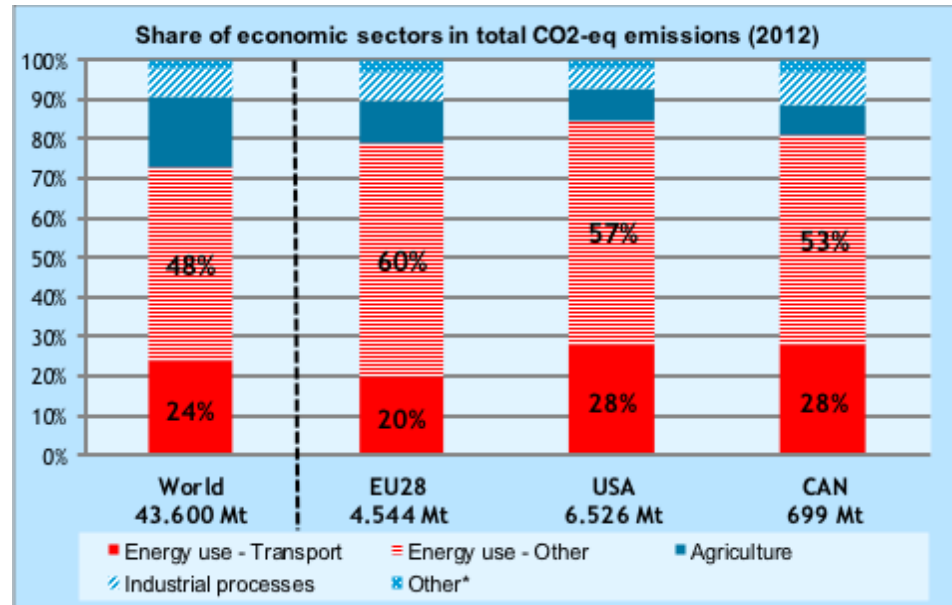

* Other: Emissions from solvent and other product use and waste.

Note: GHG emissions resulting from deforestation are excluded from this figure.


Source: IPCC, 2014a (global emissions); IEA, 2014a (shares of sectors in global emissions); EPA, 2014 (USA); EEA, 2014 (EU28); Environment Canada, 2014 (Canada).

Energy produced by fossil fuels, especially coal (44%) and oil (35%), contribute most to global GHG emissions resulting from energy use (see Figure 3).

When focusing on the EU28 and North American countries, shown in Figure 3, it becomes clear that oil consumption causes most emissions in these regions. The share of oil in total energy emissions ranges from 41 to 50%. This is because these (developed) countries use less coal (and more gas) in their energy production, and consume relatively more oil (e.g. in transport and industrial processes). Therefore, reducing emissions from oil consumption is particularly important for these countries.




Figure 3 Share of fossil fuels in energy emissions in different regions in 2012

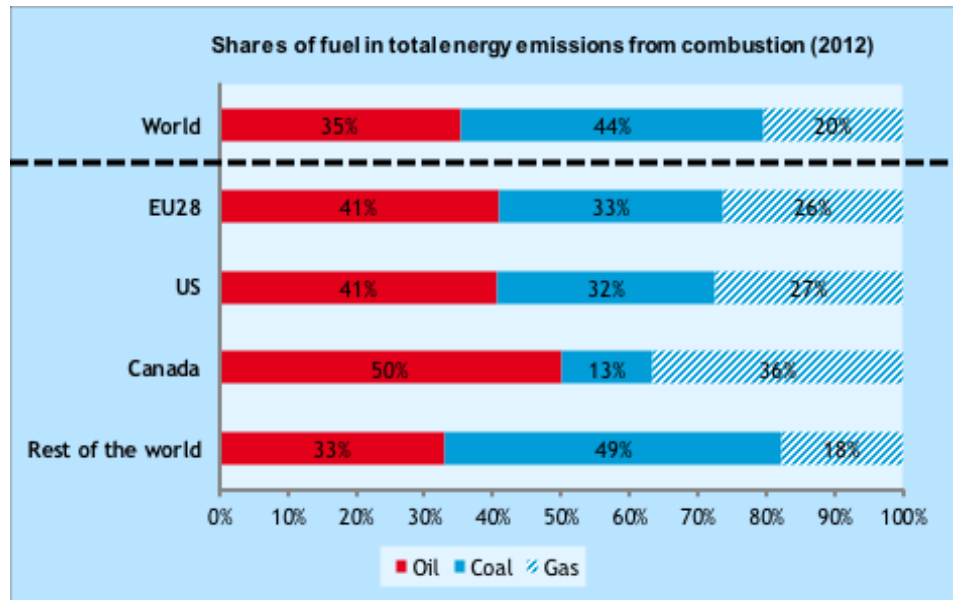

Note: Figure only covers emissions from fuel combustion and excludes fugitive emissions.
Source: IEA, 2014a.

However, as Figure 4 shows, global final oil consumption increased significantly by 62% between 1973 and 2012 (IEA, 2014b), in particular due to an increase in oil consumption by transport. This has led to an increase in the total global demand for oil, which in turn has caused developed countries to become increasingly dependent on other countries. The combination of both factors has led to a search for alternatives, such as unconventional crudes (e.g. from tar sands) and/or conventional crudes from alternative locations (e.g. oil reserves in the Arctic).

Figure 4 Development of final oil consumption by sector

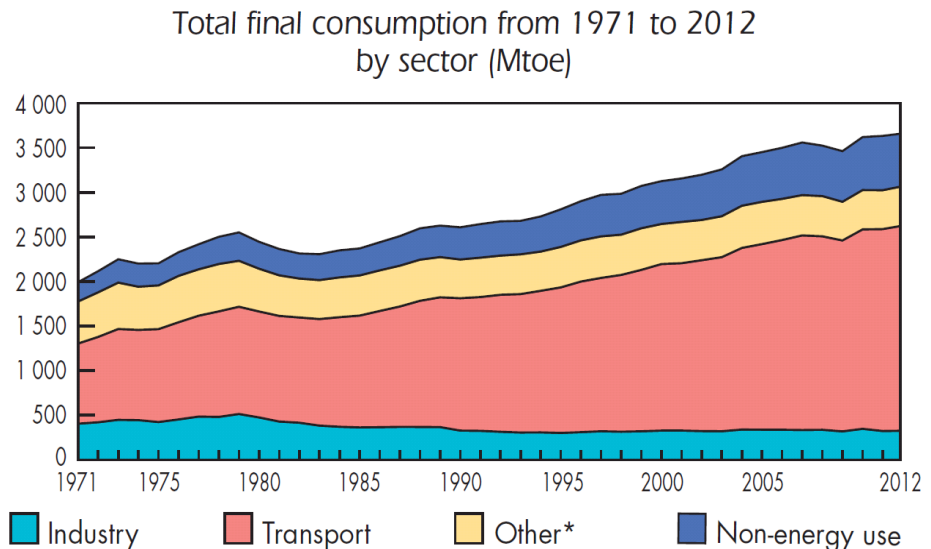

* Other: Agriculture, commercial/public services, residential, and non-specified other.
Note: Energy consumption of transport includes international maritime and aviation bunkers.
Source: IEA, 2014b.




Transport is the largest consumer of oil, representing 64% of global oil consumption. Transport is still almost fully dependent on oil products: 93% of the transport energy demand is met with oil products and only 4%, 2% and 1% with natural gas, biofuel and electricity, respectively (IEA, 2014b). It is crucial therefore to significantly reduce the oil consumption of transport in order to reduce the emissions of this sector.

2.3 Contribution of corporate fleets to climate change

As highlighted in the previous section, the transport sector is responsible for 23% of total global GHG emissions. Statistics from the IEA (2014a) show that road transport is by far the most significant contributor to these transport emissions, with a share of 72-81%. This increases to 84-95% when only taking into account domestic transport emissions (excluding international maritime and aviation transport). When focusing specifically on road transport emissions (Figure 5), it becomes clear that passenger cars, Light Commercial Vehicles (LCVs) and Heavy Goods Vehicles (HGVs) are responsible for almost all emissions from road transport (93-99%).

Figure 5 Contribution of different vehicles to total GHG emissions from road transport

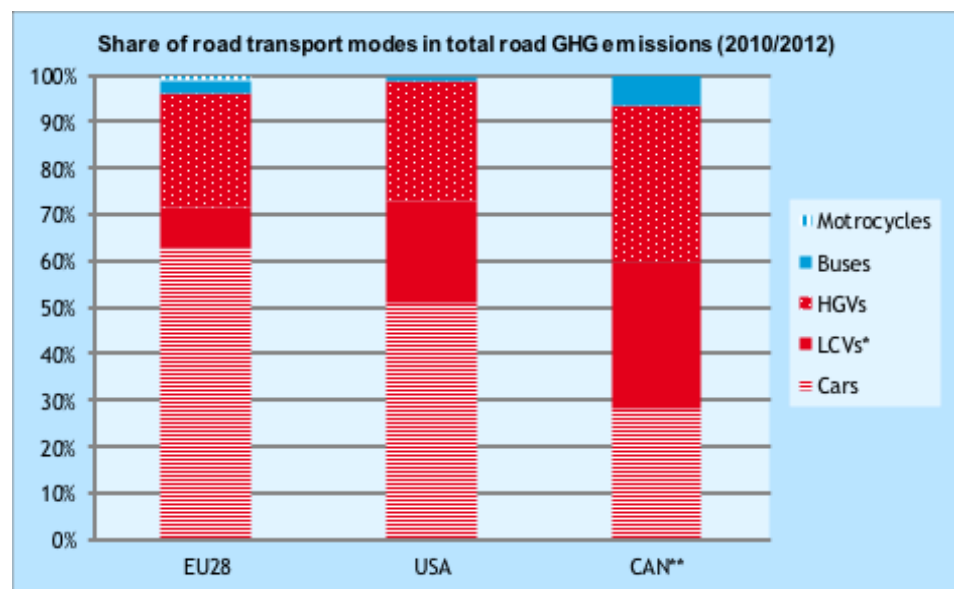

* In the EU it concerns Light Commercial Vehicles (GVW <3,500 kg) and in the USA/CAN it concerns the category Light Duty Trucks (GVW < 8,500 lbs or 3,855 kg).

** CAN only presents emission for HDVs (HGVs + busses). The share of buses in the HDV emissions is estimated with the share in the USA.

Source: SULTAN, 2012 (EU28); EPA, 2014 (USA); Environment Canada, 2014 (CAN).

The dominance of cars, LCVs and HGVs indicates that corporate fleets represent a large share of total oil consumption and emissions from road transport. Corporate fleets include the entire LCV and HGV fleet, which already causes 33% (EU28) to 65% (CAN) of the road transport emissions. Corporate fleets also cover part of the emissions from the car fleet (i.e. the company cars/leased cars used by employees).




The share of company vs. private cars in the fleet or in the emissions are not known at the global level. However, the European Union (2010) has found that approximately 50% of new car sales in 18 investigated EU countries were company cars in 2008. More recent numbers for specific countries show similar shares (e.g. 54% in the UK (DfT, 2014) in 2013 and 57% in the Netherlands in 2012 (RAI, 2013)). As most company cars are eventually sold on to the private market, and then remain on the road until the end of their vehicle life, it is clear that the types of cars that companies buy has a large impact on the composition of car fleets more widely.

When combining this with some general statistics on the EU car fleet, it is estimated that the share of company cars in the EU28 fleet is 12%. When correcting this share for the fact that company cars have a higher mileage and higher efficiency (g/km) than an average car, it can be estimated that company cars have a share of 18% in the total passenger car emissions of the EU28. The main assumptions made for this estimate can be found in Annex A.

In Figure 6, these findings for passenger cars are combined with previous findings on HGVs and LCVs. As shown, the entire corporate fleet (company cars + HGVs + LCVs) in the EU28 caused approximately 45% of the total emissions from road transport in the EU28 (377 Mt CO₂ eq.) in 2012, which is 8% of total EU28 GHG emissions. As a large proportion of private cars are former company cars, the total influence of company cars on transport's GHG emissions is even larger.

Figure 6 Contribution of corporate fleets to the road transport emissions of the EU28 in 2012

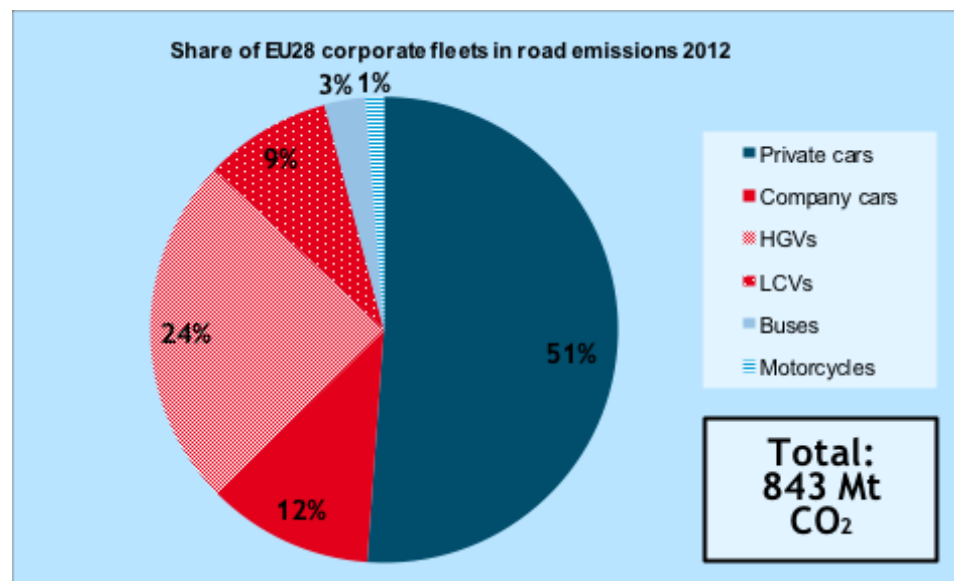

Source: CE Delft expert estimate based on EEA (2014); European Union (2010) & ACEA (2012).

2.4 Costs of corporate fleets and their fuel use

Due to the significant contribution of the EU28 corporate fleet to total GHG emissions, fleet owners can play an important role in tackling climate change by reducing the emissions of their corporate fleets. In addition, as road transport emissions rise and fall with fuel consumption, any reduction in emissions implies a reduction in fuel consumption. Considering that fuel costs are a significant share of the Total Cost of Ownership (TCO) of corporate fleets, reducing fuel consumption can result in significant monetary savings.

Relatively simple calculations can be used to generate a rough estimate of the total fuel costs of the EU28 corporate fleet in 2012. The emissions presented above can be converted into fuel consumed, which in turn can be multiplied with the average fuel price in 2012. Table 1 shows that corporate fleets consumed approximately 123 billion litres of fuel, at a total cost of almost € 200 billion.

Along with the total fuel costs of each corporate road transport mode, the Total Costs of Ownership (TCO) of the corporate fleet can also be estimated (with the known shares of fuel costs in TCOs). On average, fuel costs represented 32% of the TCO of corporate fleets (excl. wages) in 2012 and therefore the TCO of the corporate fleet were in the order of € 600 billion.

Table 1 Estimation of total emissions, fuel consumed, and costs of the EU28 corporate fleet in 2012

Corporate fleet in 2012	CO ₂ emissions	Fuel consumed (mln litre)	Fuel Costs (mln €)*	TCO (mln €)**	Share of fuel costs in TCO
Company cars	97	33,500	53,200	204,600	26%
LCVs	74	23,600	34,800	178,200	20%
HGVs	206	65,700	96,700	187,500	34%
Total of corporate fleets	377	122,800	184,700	570,300	32%

* The average fuel price (incl. taxes and duties) in the EU28 in 2012 was € 1,62/l for petrol and € 1,49/l for diesel. For cars, a share of approximately 70% petrol and 30% diesel has been assumed, shares of gas and biofuels were explicitly taken into account.

** TCO excluding wages, but inclusive of all costs of the vehicles itself; e.g. fuel, maintenance (incl. tyres), taxes, insurance, depreciation, etc.

Source: EEA, 2014b (fuel prices 2012), ACEA, 2012 (share petrol/diesel cars); GE Capital, 2013 (share fuel costs in TCO - passenger cars); ING, 2011 (share fuel costs in TCO - HGVs); MB Tech, 2010 (share fuel costs in TCO - LCVs).

There are several measures that policy makers and corporate fleet owners can adopt to reduce fuel costs (and hence GHG emissions). Policy makers in both the EU and in North America have adopted fuel economy/emission standards for newly sold LDVs for example. T&E (2011) has estimated that, by 2020, this will save approximately € 500 per year for an average car in the EU28 compared to a 2010 baseline vehicle (with 2011 fuel prices). When correcting these savings for the fact that company cars have a more efficient baseline vehicle and a higher annual mileage (see Annex A), the annual fuel cost savings of a company car are in the order of € 850² per year by 2020. For the entire corporate fleet, fuel cost savings would then be roughly € 28 billion. These numbers are, of course, highly dependent on future oil prices.

Fleet owners also have a wide range of measures at their disposal to reduce the fuel consumption of their fleets, which is the topic of the next chapter.

² € 500 [fuel cost savings for an average car in the EU] * 0.93 [correction for a more fuel efficient baseline vehicle] * 1.83 [correction for annual mileage company car vs. average car] = € 850.



3 Potential for Reducing Oil Consumption of Corporate Fleets

3.1 Introduction

The previous chapter showed the significant contribution of corporate fleets to total transport-related GHG emissions and the significant costs that result. There is a wide range of potential measures available that fleet owners can adopt to reduce the fuel consumption (and therefore GHG emissions) of their corporate fleets. In this chapter, a broad overview of these measures is presented. This shows the potential monetary costs and cost savings, GHG emission reduction potential, and other benefits (e.g. air pollution, health, corporate image), for each group of measures. The description of each measure is illustrated with real life case studies, describing the experiences of companies that have already successfully implemented such measures.

The reduction potential of the various measures are expressed in GHG emission reduction rates. The relative reductions in fuel use are in most cases roughly the same. The direct CO₂ emissions from burning a litre of petrol and diesel are 2.38 and 2.63 kg of CO₂. On a well-to-wheel (WTW) basis - so also taking account of the emissions from oil extraction, refining and transport - these factors are on average 18 to 20% higher (JRC, 2014). For unconventional oils such as from tar sands or the Arctic, these WTW emission factors are higher again.

The structure of this chapter is shown graphically in Figure 7. The measures aimed at corporate passenger transport can be found in Section 3.2, while Section 3.3 summarises measures that target corporate freight transport.

Figure 7 Overview of this chapter

Reducing oil consumption from corporate fleets							
Passenger transport				Freight transport			
Section 3.2				Section 3.3			
Passenger car fleet			All modes	Van + truck fleet			All modes
Improving fuel efficiency of conventional vehicles	Adopting alternative powertrains	Eco-driving	Measures to affect mobility choices	Improving fuel efficiency of conventional vehicles	Adopting alternative powertrains	Eco-driving	Logistics and modal shift
Section 3.2.1	Section 3.2.2	Section 3.2.3	Section 3.2.4	Section 3.3.1	Section 3.3.2	Section 3.3.3	Section 3.3.4
FRoSTA AG (Germany)	GE (USA)	KONE (Finland)	Capgemini (France)	C.R. England (USA)	British Gas (UK)	TNT (Netherlands)	Tesco (UK)



3.2 Passenger transport

In this section, the main groups of measures for reducing the oil consumption of the passenger car fleet (Section 3.2.1, 3.2.2 and 3.2.3) and for reducing emissions from commuter and business travel (Section 3.2.4) are presented.

3.2.1 More fuel efficient conventional cars

Main benefit: Significant reduction of fuel consumption and GHG emissions at very low or often even negative costs.

Co-benefits: N/a.

Disadvantages: Real world reduction potential is dependent on the driving patterns and style of employees; it can be experienced as a negative measure by employees.

Lessons learned: To capture the reduction potential, fleet owners will have to implement measures to incentivise employees to choose more efficient cars.

Description of the measure and reduction potential

There is a wide range of technical measures available to reduce emissions from conventional cars. These include retrofitting existing cars, particularly choosing low-resistance tyres. For most other fuel saving options, (e.g. on powertrain or aerodynamics), purchasing policies that favour efficient vehicles are most effective, as retrofitting is not an option. Many countries, including the USA, Canada and the EU, have regulated the CO₂ emissions of new cars. This has resulted in significant fuel efficiency improvements and an increasing supply of (very) fuel efficient vehicles, including hybrid cars. According to CE Delft & TNO (2012), a reduction potential of 35% can be achieved by combining the most cost-effective measures, which costs (from a user perspective) -57 €/tonne CO₂, i.e. it actually saves money. For petrol cars, a reduction of 42% can be achieved when applying cost-effective technologies at a cost of -5 €/tonne CO₂³. In many countries, fuel efficient cars get tax benefits, which further improves the cost/benefit ratio.

There are several measures that fleet owners can take to indirectly stimulate or enforce fuel saving technologies for their passenger car fleet. Examples are:

- **Capping the CO₂ emissions** of new cars by setting a maximum gCO₂/km for employees when they choose a car (this information might be expressed in an energy label). This measure *enforces* a particular efficiency on the fleet.
- **Downsizing**, where fleet owners enforce a maximum vehicle size. As smaller cars generally consume less fuel than larger ones, this also improves the efficiency of the fleet.
- **Providing a financial incentive** for choosing a more fuel efficient car. Some companies provide a monthly bonus to employees choosing a more efficient car than the company average. This measure *stimulates* the use of more efficient cars.
- **Choosing low resistance tyres** for all vehicles in the fleet.

Note that, except for the last one, these measures are designed to encourage employees to choose more efficient car types. There is increasing evidence that real world fuel use is much higher than energy labels might suggest and that the gap is increasing. Nevertheless, in almost every case, a lower emission factor on the test cycle corresponds to a lower real world fuel consumption, although the relative difference may be smaller than the energy label suggests.

³ Note that these estimates are sensitive to technological innovation, fuel prices, annual mileage, etc. The numbers mentioned are therefore just indicative averages.



To capture the full potential of technical measures in real-world driving conditions, other measures are recommended such as eco-driving (Section 3.2.3) and measures to incentivise employees. An example is to calculate a fuel budget for each employee (e.g. an acceptable real-world fuel consumption per km for a particular car). Employees with higher costs than their budget allows would have to pay (part of) these additional costs, while employees spending less than their budget could receive (part of) these fuel savings in cash. This incentivises the employee to not only drive as efficiently as possible, but also to buy fuel at the cheapest petrol stations.

Monetary costs and savings

The net costs of the measures outlined above for enforcing/stimulating a more fuel efficient car fleet are generally very low or even negative. This is because more fuel efficient variants of a certain car model or tyre often have no or relatively low additional cost, which is quickly earned back by fuel savings. In the case of advanced technology like hybridisation, differences in investment cost can be somewhat higher, but as the fuel savings are higher too, the payback time is usually still just a few years. The payback time varies with annual mileage and fuel and vehicle taxes. If a fleet manager provides financial incentives, the size of the incentive can be determined in such a way that the incentive paid is equal or lower than the fuel cost savings realised (GE Capital, 2013). Hence, this measure has **mostly monetary savings**, which result from reduced fuel consumption.

Some of the measures (e.g. setting CO₂ limits) may result in **reduced employee benefits**, as they are required to use smaller cars or have a more limited choice. This depends on the strictness of the limits that are set.

CASE STUDY: Green company car policy - FRoSTA AG Head Quarters: Germany
'A market leading company for frozen ready meals in Germany with 69 company cars'

Implemented measure:

- FRoSTA's board of directors has implemented a green company car policy in 2012. With this policy, FRoSTA aims to reduce the average CO₂ efficiency (in g/km) of all company cars by 4.5%. To realise this goal, the board has set mandatory CO₂ limits for different groups of employees when they choose a new car, as shown in the table below. No exceptions are allowed (FRoSTA, 2013).

Group	gCO ₂ /km Limit					Annual reduction
	2012	2013	2014	2015	2016	
Board	175	162	150	139	128	7.50%
Management	162	151	141	132	123	6.50%
Key account managers	136	130	124	118	113	5.50%
Field work	109	107	105	103	101	3%
Entire fleet	137	131	125	119	114	4.50%

- The remaining CO₂ emissions of the fleet are compensated with a climate protection project, in which the same amount of emissions are saved by replacing coal stoves in China with biomass facilities (FRoSTA, 2013).

Results:

- From August 2013 to August 2014, the company car fleet of FRoSTA consumed 14,000 litre of petrol and diesel less compared to 2012-2013, which is a fuel saving of more than 8% (FRoSTA, 2014). This can be translated in a WTW GHG emission reduction of 50 ton CO₂ (assuming 50% petrol and 50% diesel).
- FRoSTA's fleet is now CO₂ neutral (FRoSTA, 2013).
- FRoSTA has won the 'Deutschen Nachhaltigkeitspreises' for having the cleanest fleet of the 165 German companies participating in this initiative (DUH, 2014).



Costs

- With average fuel costs of 1.47 €/l (incl. taxes) in the EU in 2014 (50%-50% petrol-diesel EEA, 2014b), the savings of 14,000 litre saved FRoSTA roughly € 20,500.

3.2.2 Adopting alternative powertrains for cars

Main benefit: Significant reduction of oil consumption, GHG emissions and air pollutants.

Co-benefits: Noise reduction, lower maintenance costs, fiscal benefits for employees in some EU countries.

Disadvantages: Lower operational costs (e.g. lower fuel costs) only partially compensate the additional investment if no tax incentives/subsidies apply.

Lessons learned: To capture the full potential of the GHG emission reduction of electric vehicles, power generation should be decarbonised; in order to realise the full reduction potential of PHEVs, measures maximising the use of the electric drivetrain are highly recommended.

Description of the measure and reduction potential

Electric and semi-electric vehicles have rapidly gained popularity in corporate fleets as they significantly reduce oil consumption and GHG emissions, and contribute to the 'green' image of corporations. There are two main options:

- *Full electric vehicles (FEVs)* have zero tailpipe emissions, but also have a limited driving range (varying from 80 to 480 km depending on the model) (zerijden.nl, 2015).
- *Semi-electric vehicles* have both an electric motor and an internal combustion engine, and therefore can drive both on electricity and on petrol or diesel and therefore do not have range limitations. The electric range is significantly smaller (varying from 25 to 80 km, depending on the model) compared to a FEV (zerijden.nl, 2015). There are two main types available on the market: *Plug-in hybrid Electric Vehicles (PHEVs)*⁴ and *Electric Range Extended Vehicles (E-REVs)*⁵ (CE Delft, 2013). In the remainder of this section, PHEVs are used to refer to *all* semi-electric vehicles that can be charged from the grid⁶.

The **WTW GHG reduction potential** of FEVs/PHEVs is highly dependent on the assumed carbon intensity of the electricity mix. With the EU electricity mix in 2010 (150 g/MJ - AEA, 2012), the WTW GHG emission reduction potential of a FEV is roughly **50%** compared to a diesel car (AEA, 2012; TNO & CE Delft, 2013). The emission savings from PHEVs are also highly dependent on the share of electricity in the total mileage, which in turn depends on the frequency of charging the PHEV. The GHG reduction potential varies from about 0 to almost 50%, where 10 or 95% of the mileage is driven in the electric mode, respectively (TNO & CE Delft, 2013). This reduction potential will increase with the further decarbonisation of the electricity mix in a particular country. In order to actually realise a high GHG emission reduction potential with PHEVs, the fleet owner should take several measures. The two most important measures are the provision of sufficient charging infrastructure (both at the office and at employees' homes), and the creation of (financial) incentives for good vehicle use (e.g. fees for a high fuel consumption, bonuses for low fuel

⁴ PHEVs combine an electric motor with an internal combustion engine (ICE). When the battery is empty, the car switches to a combination of the ICE and the electric motor (CE Delft, 2013).

⁵ E-REVs always drive on the electric motor. When the battery is empty, the ICE provides power to the electric motor (CE Delft, 2013).

⁶ Semi-electric vehicles differ from regular hybrid vehicles as the battery of the latter cannot be charged externally.



consumption, internal competitions, etc.) (CE Delft, 2013). If such measures are not taken, the fleet owner risks that some PHEVs in the fleet will have higher emissions (and hence fuel costs) than necessary.

Further benefits from electric vehicles include reduced **air pollutants**. A FEV reduces WTW NO_x emissions by 75% and WTW particulate matter emission from the engine⁷ close to 100% (CE Delft et al., 2013). As for CO₂ reduction, the exact percentages here also depend on the local power mix⁸, but in all cases local emissions in urban areas are reduced significantly. Electric cars also create less **noise** than diesel or petrol cars (CE Delft & ICF, 2011). These benefits also apply to PHEVs, but only when the vehicle operates in the full electric mode. Finally, a disadvantage of electric vehicles is the relatively higher **production and disposal GHG emissions** (+52% to +60% compared to the production/disposal of a diesel car). This is related to the high energy use of battery production. This erodes some (but not all) of the aforementioned GHG emission savings (TNO & CE Delft, 2013). For a FEV, there is still a 32% reduction in emissions in comparison to a new diesel vehicle if the entire life cycle is considered (WTW emissions⁹ and vehicle production).

Other alternative energy carriers

There are several other alternative powertrains available for passenger cars, most notably **CNG** and in the longer term (> 2020) **hydrogen**. However, the GHG savings of CNG are relatively limited (15-20%) compared to FEVs/PHEVs and hydrogen (with potential WTW savings of 40% or more). Hydrogen driven cars (with fuel cells) are still in a pilot phase (CE Delft et al., 2013). Therefore, this section focusses on FEVs and PHEVs.

Monetary costs and savings

There are several differences in terms of the monetary costs and savings between electric and conventional cars. These are summarised below:

- **Purchase costs** of PHEVs and of FEVs in particular are significantly higher compared to a conventional car. The price of a FEV (€ 31,500-42,500) was roughly twice as high compared to its diesel alternative, and the price of PHEVs (€ 26,500-28,000) was 60 to 70% higher (CE Delft & AEA-Ricardo, 2013; AEA, 2012). In more recent estimates the cost differences are in the same range or slightly lower. However, in many countries tax reductions or subsidies exist for electric vehicles, resulting in a much smaller difference in purchase price. Examples include reduced company car taxes in the Netherlands and vehicle subsidies in Ontario and Quebec. The level of these tax reductions and subsidies differ significantly between countries. In various cities electric vehicles are stimulated by local incentives, e.g. an exemption from parking fees. In addition, part of the remaining price difference can be earned back with two main categories of savings:
- **Fuel cost** savings of 40-60% as illustrated in Table 2.
- **Maintenance costs** are 34% (FEV) and 17% (PHEV) lower compared to a diesel car (CE Delft & AEA-Ricardo, 2013).

The extent to which the Total Cost of Ownership (TCO) increases also depends on the lifetime of the car, residual value, annual mileage, and so on.

However, in most countries, these are higher for both PHEVs and FEVs in

⁷ The impact on the PM emissions from wear and tear (e.g. brakes and tyres, which are less harmful than emissions from the engine) are not included in this study of CE Delft et al., 2013. These emissions are likely to be comparable or could even higher compared to those of diesel cars.

⁸ The numbers mentioned are based on the power mix in the Netherlands.

⁹ Based on the average GHG intensity of electric power mix of the Netherlands.



particular than for diesel cars (CE Delft & Ricardo-AEA, 2013). This difference is likely to reduce in the future, when battery and production costs decrease (ibid.). In some countries, the TCO of a FEV and/or PHEV is already competitive, due to tax breaks and subsidies. This is the case in Norway for example, where the TCO of a BEV (Renault Zoe) is 9% lower with a lifetime of 4 years than the TCO of a comparable conventional car (Renault Clio) (ICCT, 2014). However in other countries, like Germany, the same calculation results in a TCO of the BEV that is 45% higher (ICCT, 2014). These examples illustrate the large differences between countries, and highlight the importance of fiscal incentives. In many countries online cost calculators are available for comparing the TCO of a electric vehicle with a conventional one, in a specific situation (e.g. annual mileage)¹⁰.

Table 2 Fuel cost savings of electric cars compared to petrol cars

	Petrol (14 km/l)	FEV (0.7 MJ/km)	PHEV (30% of km electric)	
			Petrol 14 km/l	Electricity 0.7 MJ/km
Average EU28 energy price in 2013-2014 (incl. taxes and duties)	1.54/l	0.2/kWh	1.54/l	0.2/kWh
Energy cost per km	€ 0.11	€ 0.04	€ 0.09	
Energy cost compared to petrol	100%	36%	82%	
Total fuel cost savings over lifetime*	0	€ 7,000	€ 2,000	

* Assuming a company car lifetime of 4 years with 25,000 km/y.

Sources: AEA, 2012, adjusted by CE Delft (energy use per km); EEA, 2014b (average petrol price in the EU28 in 2014) ; EC, 2014 (average electricity price in the EU28 in 2013).

CASE STUDY: Commitment to buy 25.000 electric vehicles - GE	Head Quarters: USA
<i>Technology, electronics and service multinational with a corporate fleet of 30.000 vehicles</i>	
Implemented measure:	
<ul style="list-style-type: none"> GE has made the commitment to purchase 25,000 (semi-)electric vehicles between 2010 and 2015. The own corporate fleet comprises of 30,000 vehicles, of which at least half will be replaced with (semi-)electric vehicles by 2015. The remainder of the 25,000 purchased EVs will be deployed at some of GE's fleet customers (GreenBiz.com, 2010). In May 2013, more than 4,000 electric vehicles had entered GE's own fleet and in total about 11,000 alternatively powered vehicles were purchased (mainly plug-in hybrids). Since then the ambition has been broadened and now also includes natural gas powered vehicles. In addition, GE has created an EV learning centre and partners with many companies to realize its ambition (e.g. GM and Ford) (Greencarreport, 2013). 	
Results:	
<ul style="list-style-type: none"> GE: 'By electrifying our own fleet, we will accelerate the adoption curve, drive scale, and move electric vehicles from anticipation to action' (GreenBiz.com, 2010). With an average PHEV annual mileage of 25,000 km/per year and an average WTW GHG emission reduction of about 20%, the total WTW GHG emission reduction of 25,000 plug-in hybrid vehicles is about 25,000 ton of CO₂ per year. 	
Costs	
<ul style="list-style-type: none"> Purchase cost of a Chevrolet Volt are € 42,000 (excl. tax credits) (zerijden.nl, 2015). However, with the large amount of vehicles purchased, GE may have received some a discount. Fuel cost savings per PHEV in the USA are roughly € 300 per year (25,000 km). With 25,000 	

¹⁰ E.g. http://driveclean.ca.gov/pev/Costs/Calculate_Your_Costs.php or tools provided by car manufacturers like Nissan or Tesla.



vehicles, fuel costs savings are roughly € 7 million per year. With an average lifetime of 4 years for a company car, the fuel cost savings over the lifetime are € 1,200 per vehicle and € 30 million for 25,000 PHEVs.

3.2.3 Eco-driving with passenger cars

Main benefit: Reduces fuel consumption/CO₂ emissions per kilometre by 5-25%.
Co-benefits: Lower number of accidents and associated costs, lower maintenance costs (e.g. fewer flat tyres), reduced noise.
Disadvantages: n/a.
Lessons learned: Some sort of monitoring and feedback to employees is crucial to maintain the positive effects of the driving course.

Description of the measure and reduction potential

The use of fuel-efficient driving styles is a very popular measure to reduce the fuel consumption of corporate fleets. So-called 'eco-driving' can involve several driving techniques that drivers can use to improve the fuel economy of their car (CE Delft & TNO, 2012; AEA et al., 2010):

- ensuring that the engine is used efficiently, for example by using a higher gear and limiting fast acceleration;
- an anticipating driving style, minimising unnecessary braking;
- minimising redundant energy use, e.g. by minimising idling and by limiting unnecessary energy use;
- maintaining tyre pressure at specified levels.

Most estimates available in literature indicate that eco-driving techniques result in an average emission reduction of 10 to 15% (CE Delft, 2012).

The starting point for encouraging employees to adopt this eco-driving style is often to implement a driving course, which immediately results in significant fuel savings of 5 to 25% (CE Delft, 2009). However, it is well known that the savings reduce rapidly if driving courses are not regularly repeated and/or if no follow-up measures are taken by the company to motivate employees. In this case, the reduction potential that is obtained a year or more after the course has been estimated at 3% (CE Delft, 2009; TNO et al., 2006; McKinsey & Company, 2009).

With follow-up measures, corporate fleet owners can obtain a higher reduction potential in the longer term as well. Such follow-up measures are therefore equally as important (if not more) as the driving course itself. This can entail:

- Monitoring the performance of individual drivers and offering feedback, e.g. in a periodic meeting, on the employees' pay slips, by sending monthly reports to employees about their performance, and so on.
- Providing immediate feedback to drivers, e.g. by gear shift indicators (GSI) or with smart phone apps. Kurani et al. (2013) measured a reduction in fuel consumption of approximately 2.8% due to the use of in-car feedback devices with a sample of 118 cars. TNO et al. (2006) estimates a slightly lower reduction potential of 1.5% (without feedback via smart phones at that time).
- Internal eco-driving competitions. Companies increasingly publish the best performing drivers and/or reward the winning drivers with a prize.

FLEAT performed a pilot with 6 corporate fleets (643 LDVs, including vans). The participating fleet owners implemented a driving course and some sort of monitoring and feedback. They measured a yearly reduction of 2.2 to 21.8% (FLEAT, 2014). One company did not implement the driving course itself, but



only the monitoring and feedback, and actually obtained a relatively large reduction, which shows the importance of implementing a follow-up system (ibid.).

Monetary costs and savings

The cost of applying the full eco-driving package outlined above include:

- The trainer fee for the driving course and loss in man hours when employees are in training. TNO et al. (2006) estimated the costs of the driving course at € 50-100, which does not cover the loss in man hours. FLEAT (2010) does include this loss of man hours, which results in costs of € 300 to 1,000 per driver.
- Purchase costs of ICT tools to assist drivers: € 15 for gear shift indicators (TNO et al., 2006); in many cars these are standard.
- Setting up a monitoring and feedback system, and the FTEs spend on the actual execution the system. Costs are highly dependent on the complexity of the monitoring and feedback, wages, etc.

The monetary fuel savings of eco-driving can be calculated by multiplying the absolute reduction in fuel consumption (in l/km) with the fuel price and mileage of the company car. Other monetary benefits are cost reductions from **fewer accidents** and **lower maintenance**, which are often not quantified in literature but can be significant. Despite the fact that only fuel cost savings are taken into account, most studies estimate that eco-driving has negative abatement costs (i.e. higher benefits in terms of fuel savings than costs), with abatement costs ranging from -€ 315 to € 15 per tonne (CE Delft, 2008, cited in CE Delft & TNO, 2012; TNO et al., 2006; FLEAT, 2010).

Finally, eco-driving can result in societal benefits, such as reducing traffic noise and improving road safety (which in turn positively impacts congestion, reduces medical costs and improves health) (CE Delft, 2012).

Eco-driving itself has no effect on air pollution.

CASE STUDY: ECO-SAFE DRIVING PROGRAM - KONE	Head Quarters: Finland
<i>A globally leading company in the elevator and escalator industry with a fleet of 14,000 vehicles</i>	
Implemented measure: An eco-safe driving programme to reduce fuel consumption/CO ₂ and accidents with: <ul style="list-style-type: none"> – A driving course. – Follow-up programme with an in-vehicle handbook with handy tips (e.g. closing windows to reduce drag, changing gears, and buckling up before leaving), posters throughout the office, and so on. – An internal competition (Jeu Roule Habile eco-safe driving challenge), which rewards the best driver with a prize (Knight, 2010; KONE, 2012). 	
Results <ul style="list-style-type: none"> – Reduction in accident rate: 13% in two years after implementation (Knight, 2010). – Reduction in KONE's fuel consumption/emissions of 576 cars and small vans monitored in the FLEAT project (FLEAT, 2010): <ul style="list-style-type: none"> • reduction in fuel consumption: 6% (from 7 l/100 km to 6.6 l/100 km); • CO₂ savings per year per vehicle: 400 kg/year/vehicle. 	
Costs Costs numbers are not provided by KONE, but have been estimated in the FLEAT monitoring project mentioned above. They estimate a cost of € 300-1,000 for the driving course itself, loss of man hours, setting up a feedback scheme and for monitoring (FLEAT, 2010). With average fuel costs of 1.47 €/l (incl. taxes) in the EU in 2014 (50%-50% petrol-diesel EEA, 2014b) and KONE's annual mileage of nearly 36,000 km per car/van, the fuel savings of 6% per	



year result in:

- A payback period of 1.3 years (costs of € 300) to 4.4 years (costs of € 1,000).
- Abatement costs of -€ 340 to € 55/tonne CO₂ over the average lifetime of a company car (4 years).

3.2.4 Measures to affect mobility choices

Main benefit: Reduced CO₂ emissions due to reduced travel resulting from teleworking and virtual meetings (one day a week reduces emissions by 14%), and a modal shift from cars to alternative modes.

Co-benefits: Less air pollutant and noise emissions, lower congestion levels, improved road safety, increased productivity of employees, and increased (perceived) quality of life of employees (only teleworking).

Disadvantages: Less human interaction (teleworking and virtual meetings), less control for managers (teleworking).

Lessons learned: Communication with employees and customers is crucial to successfully implement teleworking and the application of virtual meetings.

Description of the measure and reduction potential

Mobility choices can be affected by a broad range of measures. Two main categories can be distinguished that have been implemented by front runners: **reducing travel** by implementing teleworking and virtual meetings and **stimulating modal shift**, e.g. by providing business travel cards.

Over the last decade employees have increasingly been given the opportunity to telework. In the Netherlands, about 60% of companies currently provide this opportunity to employees, compared to 25% in 2003 (CBS, 2013). In Europe, the share of companies providing teleworking opportunities is 60% on average, ranging from 80% (in Finland) to 37% (in Hungary).

Teleworking can be applied in several ways (Gareis, 2003). The most traditional type of teleworking is working from home. However, mobile working during business trips, at customers' premises and/or at dedicated telework offices are other options. Successful implementation of teleworking requires intensive communication between the employer and employees and a more performance based management style (Peters en Den Dulk, 2003).

Teleworking leads to a net reduction in CO₂ emissions. The impact of reduction in kilometres travelled can however be partly off-set by an increase in energy use at home (for heating and ICT) and some additional car use for non-commuting reasons (rebound effect). Most recent evidence suggests that teleworking will result in a net reduction of CO₂ emissions (CE Delft, 2012; CE Delft et al., 2014). The application of teleworking for one day a week results in 14% reduction of CO₂ emissions on average. This estimate does not include second order (rebound) effects (e.g. people moving farther away from work if they have the opportunity to work at home).

Another option to reduce employees' travel is to adopt **virtual meetings** instead of face-to-face meetings, e.g. audio conferencing, video-conferencing or web-conferencing (CE Delft, 2012). Virtual meetings reduce the amount of business kilometres travelled, and hence reduce CO₂ emissions. A small part of this reduction will be eroded with the additional energy use from virtual meeting equipment. However, this effect is small: the net impact of replacing 20% of the face-to-face meetings by virtual meetings is a 17% reduction of meeting-related travel CO₂ emissions (CE Delft et al., 2014).



A **modal shift** from cars to alternative transport modes in business and commuting travel can be stimulated by various means such as financial incentives, facilities or, for example, offering multimodal business travel cards to employees. Most of these cards can also be used for payment in car parks or to easily book flex work stations. Business travel cards can particularly affect car use by company car owners. Currently, these people have no incentive to make use of other transport modes, as they can use their car for free while they have to pay for other modes. Evidence from Dutch cases show a reduction in car kilometres of 7% when this group is provided with a travel card (CE Delft, 2010).

Monetary costs and savings

Teleworking results in various cost savings for companies, in particular lower travel costs and lower energy costs for heating, air conditioning and electricity in offices. In some cases it can also lead to cost savings from reducing the amount of office space and parking places needed. Last but not least, teleworking can have a positive impact on the productivity of employees (Ecofys, 2009; Sustel, 2004). This is due to lower absenteeism, longer working hours (which are not claimed), and higher concentration levels at home. CE Delft (2008) estimates that these cost savings can amount to more than € 2,000 per employee per year. Using virtual meetings has the same types of benefits as teleworking (CE Delft, 2012), but no cost estimates are available.

Finally, both teleworking and virtual meetings can result in societal benefits (CE Delft, 2012). The reduction of vehicle kilometres results in a reduction of traffic noise, air pollution and congestion levels and may improve road safety. Additionally, teleworking may improve (experienced) quality of life and employees' work-life balance (Sustel, 2004).

Increased use of public transport or cycling can result in various cost savings for employers, such as higher productivity of *employees* (as employees travelling with public transport have the opportunity to work while travelling) or, in the case of cycling, better health. Multimodal business travel cards can reduce *administrative costs*. The impacts on the mobility costs of measures aimed at modal shift are very case specific; no quantitative evidence is available on the overall cost savings that could be realised. Modal shifts can result in several societal benefits, e.g. less noise and air pollutant emissions, lower congestion levels and improved road safety.



Implemented measure:

The New Way of Working programme enables (some) employees of Capgemini Netherlands to work in a variety of locations at a time that suits them best. It consists of four pillars:

- Accommodation: in order to enable employees to work at the most efficient locations, Capgemini provides them with all kinds of mobile devices and has opened small offices in several locations (Meeting Points), while scaling down the main premises of Capgemini.
- Mobility: travelling in the most efficient way by providing alternative lease concepts and public transport cards.
- Travel portal: online communication platform, showing where and when all employees are working and which facilities (e.g. conference rooms) are available.
- Communication: intensive communication with the relevant employees and customers. Additionally, it requires managers to switch to a performance based management style.

Results

- A reduction of vehicle kilometres and CO₂ emissions in the range of 20-25% is expected.
- Less congestion, since commuting levels decrease.
- Due to the higher level of flexibility provided to employees, average productivity is expected to improve. In addition, the work-life balance of employees will likely increase.

Costs

Implementation of the programme required substantial investments which have not been specified. However, there are also large financial benefits; by reducing the overall required office floor area by 30%, about € 5.5 million per year could be saved by Capgemini. The payback period of the programme is estimated at 1 to 1.5 years.

3.3 Freight transport

In this section, the main groups of measures for reducing the oil consumption of the LCV and HGV fleet (Section 3.3.1, 3.3.2 and 3.3.3) and for reducing emissions from freight transport operations in general (Section 3.3.4) are presented.

3.3.1 Improving the fuel efficiency of conventional vans and trucks

Main benefit: Reduction of fuel consumption and CO₂ emissions. Potential varies between technologies, but ranges from 1-4% (e.g. a single measure for improving aerodynamics) to 8-30% (hybridisation).

Co-benefits: Fewer flat tyres with tyre pressure monitoring technologies.

Disadvantages: Some technologies (e.g. hybridisation) require significant upfront investments.

Lessons learned: Benefits of technologies differ between vehicle segments (e.g. aerodynamics has the largest benefits in regional/long haul transport, and hybridisation for lighter vehicles in urban conditions).

Description of the measure and reduction potential

There is a wide range of (retrofit) technologies available which companies can apply to reduce the fuel consumption of conventional vans and trucks.

Most technologies aim to reduce fuel consumption by reducing aerodynamic drag, rolling resistance, vehicle weight or by improving the efficiency of the engine and transmission. Table 3 summarises some of the measures available and their reduction potential. As the actual savings will differ between companies, due to different driving patterns and vehicles, the last column

specifies the mission profiles which are most appropriate for that particular technology. A more detailed description of these technologies can be found in Annex B.

Table 3 Overview of possible measures to increase energy efficiency of trucks

Type	Technology	Fuel savings (%)	Segments*
Aerodynamics	Trailer rear end (aft box) taper	1.5 - 3%	U
	Boat tail	2% - 4%	R/L
	Trailer (box) skirts	2% - 3%	U
	Cab side extension or gap fairings	0.5% - 1%	U
	Full gap fairing	1% - 2%	R/L
	Full skirts	2% - 3%	R/L
	Roof deflector	2% - 3%	U
	Streamlining	2% - 3%	S
Light-weighting	Material substitution	0.5% - 1.5% (C/S/M) 2% - 5% (U/R/L)	all
Tyres	Automatic tyre inflation	0,5%	R/L/C
	Low rolling resistance tyres	1% - 2% (S) 2% - 4% (U/M)	S/U/M
	Next generation low rolling resistance tyres (aluminium wheels)	9-12%	U/R/L /C
Transmission and driveline	Aggressive shift logic & early lockup	0.5% - 1% (M) 1.5% -2.5% (S)	S/M
	Increased transmission gears	2% - 4%	S/M
	Transmission friction reduction	1% - 1.5%	All except U
Engine efficiency	Improved diesel engine**	9.5% - 12%	U/M/R/ C
	Improved diesel engine***	14.5%-18%	L
	Improved diesel engine****	4% -5%	S
Hybridisation	Dual-mode hybrid	20 - 30% (S) 8% - 12% (R/L)	S/R/L
	Parallel (hydraulic) hybrid	25% - 35%	U/M/C

U = Urban: GVW 7.5-14 t 40,000 km; S = Service, GVW 3, 5 t-7.5 t 35,000 km; M = Municipal utility, GVW 7.5 t-28 t 25,000 km; R = Regional: GVW 7.5-16 t 60,000 km; L = Long haul: GVW 16 t-40> 130,000 km; C = Construction: GVW 7.5 t-40 t 50,000 km.

** Advanced 6-9 L 2020 engine (220 to 230 bar cylinder pressure, 3,000 bar fuel injection, electrically boosted dual-stage variable geometry turbocharger, improved closed-loop engine controls, electric accessories, peak thermal efficiency 46 to 49%).

*** Advanced 11-15 l engine (240 bar cylinder pressure, 4,000 bar supercritical atomisation fuel injection, electrically boosted variable geometry turbocharger, improved closed loop engine controls, bottoming cycle, electric accessories, peak thermal efficiency 51 to 53%).

**** Improved diesel engine (higher fuel injection, increased cylinder pressure, improved controls & turbocharging).

Source: TIAX, 2011, edited by CE Delft.



The total combined reduction potential between 2015 and 2020 if all the measures shown in Table 3 were adopted is 35% for Service and Regional, 45% for Urban and Construction, and 40%¹¹ for Long Haul Vehicles (TIAX, 2011). The technical measures that can be applied to large vans are largely similar to those that can be applied to service vehicles, and those of small vans to the measures described for passenger cars (Section 3.2.1). Annex B summarises these measures for small, medium and large vans.

Monetary costs and savings

Table 4 shows the payback periods of the different technical measures covered by TIAX (2011). These payback periods are calculated with the annual mileages of the respective mission profile, the savings as shown in Table 3, and the investment costs of each technology (see Annex B). As indicated with the green boxes (payback period of ≤ 3 years), many of the available technologies break even within 3 years and, from then on, these technologies start to reduce costs. Therefore, if the vehicle lifetime is longer than 3 years, these technologies have negative CO₂ abatement costs (i.e. they save more money than they cost).

The orange boxes (payback period of $>3-7$ years) and red boxes (payback period of ≥ 7 years) show technologies with longer break even periods, such as light-weighting (due to high investment costs and relatively small savings). Hybridisation also has moderate to long payback times, but also results in significant savings thereafter, especially for vehicles used in urban conditions.

¹¹ The cumulative technical reduction potential of long haul freight as calculated in TIAX (2011) also includes predictive cruise control, route management, and training and feedback.



Table 4 Payback periods of different technical measures (in years)

Technology	Service*	Urban*	Municipal*	Regional*	Long haul*	Construction*
Trailer rear end (aft box) taper		2				
Boat tail				2	1	
Trailer (box) skirts		3				
Cab side extension or gap fairings		5				
Full gap fairing				3	1	
Full skirts				4	2	
Roof deflector		2				
Streamlining	0,5					
Material substitution	8	8	14	5	2	6
Automatic tyre inflation (truck)				29	11	33
Automatic tyre inflation (trailer)				2	1	
Low rolling resistance tyres	0,1		1			
Next generation low rolling resistance tyres (aluminium wheels)		1		0,2	0,1	0,2
Aggressive shift logic & early lockup	0,3		1			
Increased transmission gears	3		4			
Transmission friction reduction	1		1			
Improved diesel engine	4	3	2	2	1	2
Dual-mode hybrid	13			4	5	
Parallel (hydraulic) hybrid		5	6			3

* Urban: GVW 7.5-14 t 40,000 km; Service, GVW 3.5 t-7.5 t 35,000 km; Municipal utility, GVW 7.5 t-28 t 25,000 km; Regional: GVW 7.5-16 t 60,000 km; Long haul: GVW 16 t-40> 130,000 km; Construction: GVW 7.5 t-40 t 50,000 km.

Note: TIAX (2011) has assumed a diesel price of 1.30 €/l in their estimates.

Source: TIAX (2011).



“The largest temperature-controlled carrier in the world with 4,100 tractors and 6,200 trailers”

Implemented measure:

- C.R. England participates in the SmartWay Transport Partner programme, a national public-private partnership in the USA that aims to reduce emissions of freight transport. The company has implemented many technical measures on all tractors and trailers:
- **Aerodynamics:**
 - on all tractors: aero kits, aluminium wheels, low rolling resistant tyres and wheel covers;
 - on all trailers: side skirts, low rolling resistant tyres with aluminium wheels to reduce weight.
- **Idling reduction:** vehicles are equipped with economical bunk heaters that prevent idling for heat during winter, and with ambient sensors and computer programming which prevent idling if the temperature is between -6 to 20 degrees Fahrenheit.
- **Speed reduction:** New trucks are set to 100 km/h.
- **Several operational measures:** e.g. training, route optimisation, increasing loads, etc. (C.R. England, 2015).

Results

- Due to the implementation of this wide range of technologies on conventional trucks (in addition to operational measures), C.R. England has the highest rank possible (1 on a scale from 1-5) in the SmartWay database which shippers can use to select carriers (SmartWay, 2015).
- Several awards for environmental excellence, e.g. SmartWay Excellence Award (2009, 2012) and the Food Logistics Top Green Supply Chain Partners Award (2013, 2012) (C.R. England, 2015).
- In 2014, the g/mile performance of C.R. England was 1,550, while the average of all participating companies with refrigerated trucks (2,500+) was 1,686. The efficiency of C.R. England is therefore 8% better (SmartWay, 2015). When comparing this to the total average truck fleet of the USA this will be even higher, as the companies participating in SmartWay are likely to be more focused on GHG emissions compared to non-participants.
- In one year, C.R. England has saved 0.07 MPG, which saved over 3 million litres of fuel in total. This was due to rolling out trailer tails, wheel covers, fuel coaching and idle air technology (PRNewswire, 2014).

Costs

- Investment costs are not publicly available. However, the saving of 0.07 MPG that resulted in a reduced fuel consumption of over 3 million litres of diesel, resulted in a cost saving of € 2.5 million (PRNewswire, 2014). A saving of 3 million litres would result in even higher fuel cost savings with EU28 average prices (1.40/l) of roughly € 4.2 million.

3.3.2 Adopting alternative powertrains for vans and trucks

Main benefit: Significant reduction of oil consumption, GHG emissions and air pollution.

Co-benefits: Noise reduction, lower maintenance costs (EVs).

Disadvantages: Requires large upfront investments, which are only partially earned back with lower operational costs (e.g. lower energy costs, taxes, etc.).

Lessons learned: To capture the full potential of the GHG emission reduction of electric vehicles, power generation should be decarbonised.



Description of the measure and reduction potential

In addition to buying more fuel-efficient conventional vehicles, fleet owners can significantly reduce their oil consumption and GHG emissions with the adoption of alternatively powered vehicles. Currently, there are two main alternative energy carriers available.

Electricity. Electric vehicles are powered with an electric motor and have a limited (electric) driving range of about 125 km. Consequently, they provide an alternative to vans and rigid trucks with low mileages (e.g. city distribution) (CE Delft & DLR, 2013). Two main electric vehicle types can be distinguished:

- *Full electric vehicles (FEVs)* have zero tailpipe emissions. The overall WTW reduction potential is dependent on the energy efficiency and source of the electricity. According to CE Delft et al. (2013) the reduction is 15% (electricity of 124 g/MJ) and according to AEA (2012) 45% (electricity of 150 g/MJ) for a rigid truck. AEA (2012) estimates that the WTW reduction potential of electric vans is larger (58%). In the future, increasing shares of renewable electricity will further enhance the emission reduction potential (CE Delft & TNO, 2014).
- *Semi-electric vehicles* (Plug-in Hybrid electric vehicles - PHEVs¹²/Electric Range Extended Vehicles - E-REVs¹³), which can drive both on electricity and diesel. In the remainder of this section they are referred to as PHEVs. The reduction potential is highly dependent on the share of 'electric kilometres' (CE Delft & TNO, 2014). If the PHEV is mainly operated in the electric mode, GHG emission reductions are comparable to those of FEVs. With lower shares, the reduction potential decreases.

Natural Gas. Gas powered vehicles, which can either use CNG or LNG (and, in case of dual fuel vehicles, diesel as well). While CNG is mostly appropriate for vans and rigid trucks, LNG can provide an alternative for heavier vehicles (CE Delft et al., 2013).

- *CNG powered vans and rigid trucks* reduce WTW GHG emissions by -12% (van) to -20% (truck) compared to diesel;
- *LNG powered rigid trucks* reduce WTW GHG emissions by -17% to -27% and *tractor-trailers* by -11% to -19% compared to the diesel variants (CE Delft et al., 2013).

Hydrogen - Fuel Cell Electric Vehicles (FCEVs)

In the medium to long term (>2020), hydrogen is likely to provide an additional alternative to diesel, especially for long-distance freight transport. Hydrogen has a much higher driving range compared to battery electric vehicles. For shorter distances, where BEVs can also be applied, FCEVs are generally less efficient, as hydrogen must be electrochemically transformed into electricity before it powers the electric motor (CE Delft & DLR, 2013). However, as these vehicles are currently in the pilot phase, they are not covered in this section.

¹² PHEVs combine an electric motor with an internal combustion engine (ICE). When the battery is empty, the car switches to a combination of the ICE and the electric motor (CE Delft, 2013).

¹³ E-REVs always drive on the electric motor. When the battery is empty, the ICE provides power to the electric motor (CE Delft, 2013).



In addition to GHG emission reduction potential, **air pollutants** (NO_x and PM) can also be reduced with the adoption of alternative powertrains. With a reduction of approximately 90%, the benefits are largest for the adoption of FEVs. For gas powered trucks (both CNG and LNG), emissions of NO_x and PM are roughly comparable to a EURO VI Diesel truck. For vans, CNG results in a 50% reduction of NO_x emissions compared to EURO 6, and comparable PM emissions (CE Delft et al., 2013).

Finally, FEVs (and to a lesser extent PHEVs and CNG or LNG powered vehicles) **reduce noise pollution**, especially in urban areas (CE Delft & ICF, 2011)

Monetary costs and savings

Each alternative powertrain mentioned above has **higher purchase costs** compared to its conventional (diesel) alternative. The additional costs of gas-powered vehicles are in the range of € 1,700 for a van to € 40,000 for a rigid CNG or LNG truck (CE Delft et al., 2013). This corresponds to 20-40% higher costs, which is significantly lower than the additional costs of electric vehicles, which are currently in the range of 50 to 200%. The market is changing rapidly, so these percentages are just indicative. The additional purchase costs of electric vehicles are expected to decrease significantly in the coming decades (due to upscaling production) (CE Delft & DLR, 2013). However, if the number of gas and electric powered vehicles increases, an alternative refueling/charging network needs to be realised. The cost of upscaling the network may erode some of the expected cost decreases.

Part of the higher purchase cost can be earned back with savings on fuel, as illustrated by Table 5; **fuel costs savings** per kilometre vary between the segments and energy carriers but are roughly in the range of 30-60%. In addition, (semi-)electric vehicles are expected to have **lower (-30%) maintenance costs** (CE Delft & DLR, 2013). The resulting Total Costs of Ownership (TCO) will depend on vehicle lifetimes, mileages, national subsidies, tax benefits (if any), and so on. In general, the TCOs are in many cases significantly higher for alternative powertrains compared to conventional ones. However, in the case of (local) subsidies or tax advantages and/or high annual mileages, alternative powertrains can be competitive.

Table 5 Comparison of fuel costs diesel vs. alternative powertrains

	Diesel	CNG	LNG	Electricity
Average EU28 energy prices (incl. taxes and duties)	1.40/l	0,6/m ³	0,9/kg	0.2/kwh
Van				
Energy cost per km	€ 0.12	€ 0.08		€ 0.08
Energy cost compared to diesel	100%	65%		70%
Rigid truck				
Energy cost per km	€ 0.43	€ 0.25	€ 0.22	€ 0.34
Energy cost compared to diesel	100%	59%	51%	78%
Tractor-trailer				
Energy cost per km	€ 0.44	€ 0.26	€ 0.22	€ 0.34
Energy cost compared to diesel	100%	59%	51%	78%

Sources: MJ/Km efficiency from TNO et al. (2014); average diesel price in the EU28 in 2014 from EEA, 2014b ; average electricity price in the EU28 in 2013 from EC, 2014; average CNG/LNG prices in 2010 from AEA, 2012.



Implemented measure:

- British Gas aims to reduce its emissions by 25% by 2015 compared to 2007. One of the measures implemented to reach this goal is to replace part of the fleet with FEVs.
- A pilot with 28 Full Electric Vans (Nissan e-NV200) was performed during 6 winter months to assess the appropriateness of FEVs in the regular service schedule. By the end of 2014, 100 FEVs were adopted permanently into the van fleet.
- British Gas has made the commitment that 10% of the fleet (1,300 vans) will be electric by 2017 (British Gas, 2014).

Results

- The 28 FEVs in the pilot covered 96,600 km in total (British Gas, 2014). The average use of a full electric van (real world) is 0.71 MJ/km, which combined with a WTW CO₂ emission factor of 150 g/MJ (AEA, 2012), resulted in CO₂ emissions of roughly 10 tonnes. If these kilometres were driven with an average diesel van (real-world consumption of 2.9 MJ/km, WTW emission factor of 87 g/MJ) (AEA, 2012), WTW emissions would have been 24 tonnes. During the 6 month pilot alone, **GHG emissions** have been reduced by approximately 58%.
- Reduction of **maintenance costs** is likely to be in the order of 20-40% (Fleet news, 2015).

Costs

- The **purchase cost** of one Nissan e-NV200 is roughly € 25,000 (Nissan, 2015), so this pilot required an investment in the order of € 700,000.
- **Fuel cost savings** of the pilot project are roughly (96,600 km * [0.12 - 0.08] €/km) € 3,900: Note that this is an underestimation considering that it concerns an energy supplying company, which will not have to purchase power from a third party. If there are no additional costs to the supplied electricity, savings are € 11,600.
- The lifetime of an average British Gas van is 96,600 km (5 years with 12,000 miles per year) for smaller vans (Fleet news, 2015). If this lifetime is applied to the 28 FEVs, fuel costs savings over the lifetime of these vans are in the order of € 110,000 to € 325,000, earning back 31 to 46% of the overall investment.

3.3.3 Eco-driving with vans and trucks

Main benefit: Reduces immediate fuel consumption/CO₂ up to 20%, with long-term effects of 5-7%.

Co-benefits: Lower number of accidents and associated costs; lower maintenance costs (e.g. fewer flat tyres); reduced noise.

Disadvantages: n/a.

Lessons learned: Monitoring and feedback to drivers is crucial to maintain the positive effects of eco-driving.

Description of the measure and reduction potential

Truck drivers have a significant impact on the real-world energy consumption of their trucks. Consequently, eco-driving is one of the measures with great potential for reducing fuel consumption. The main elements of eco-driving were already described in the passenger car section (Section 3.3.2). A first step in applying eco-driving is an eco-driving training course, which can result in significant immediate fuel savings per driver; EcoEffect monitored 2,600 drivers (of vans and trucks) and found savings of up to 20% at the training day (IRU, 2014). The savings are highly dependent on the applied driving style before the training (TNO, 2013).



In order to realise *long-term* fuel saving benefits with eco-driving, monitoring and feedback arrangements are crucial (CE Delft, 2014). If not implemented, truck drivers will fall back into their conventional driving style. For freight transport, there are several ICT systems that can assist fleet owners with monitoring and feedback. According to real-world measurements of TNO (2013) there is not much difference between the provision of feedback with or without ICT systems. In both cases, fuel savings of 1-4% at the fleet level, with savings of up to 8% for some individual drivers were realised.

In order to improve effectiveness, fleet owners can choose to provide feedback to drivers (e.g. on pay slips or in monthly meetings), to organise internal competitions, or to provide financial rewards (CE Delft, 2014). The latter two can significantly enhance the positive effects of eco-driving, but may also result in unhealthy competitive behaviour (FLEAT, 2012) and the unwillingness of drivers to accept clients with difficult routes (in terms of fuel consumption) (CE Delft, 2014). When eco-driving is combined with monitoring and feedback, it can result in significant long-term fuel savings of 8.5 to 11.4% according to FLEAT (2012) and of 5-7% according to EcoEffect (IRU, 2014).

Finally, an operational measure closely related to eco-driving which can further enhance fuel savings is reducing the maximum speed in speed limiters (CE Delft, 2014). For vans, limiting speed to 110 (or 100 km/h) results in additional savings of 4% (or 7%) for example (CE Delft, 2010). For trucks, speed limiters are mandatory in the EU (Directive 92/6/EEC), which has resulted in a 1% reduction of CO₂, NO_x and PM emissions (TML et al., 2013). Further reducing the speed limiter (e.g. 82-85 km/h) results in additional savings of roughly 2-6% according to fleet owners (CE Delft, 2014).

Monetary costs and savings

The monetary costs and savings of eco-driving are highly dependent on factors such as the frequency of eco-driving courses, the type of ICT system chosen and feedback arrangements. In the Netherlands, the costs of an ICT system itself comprise of purchase costs (€ 0-3,500) and monthly fees (€ 15-55). However, this excludes the man hours required for monitoring and feedback, which can result in significant costs (CE Delft, 2014).

TIAX (2011) and FLEAT (2012) estimate that the average costs of training and feedback are € 615 and € 300-1,000 per driver, respectively. With these cost figures, a rough estimation can be made of the payback period and costs per abated tonne of CO₂, as shown in Table 6. Although these figures are highly dependent on assumptions made, eco-driving is very likely to have higher monetary savings in terms of fuel savings than costs.

Table 6 Estimation of pay back period and marginal abatement costs of eco-driving

Eco-driving type	Assumptions	Pay back period	€/tCO ₂ **
'ICT fuel management systems' (TNO, 2013)	Costs: € 3,500 + 55/month Savings: 4% per year	1.7 years	-260 to -220 €/tCO ₂
'Training and feedback' (TIAX, 2011)	Costs: € 615 Savings: 2.2% per year	0.5 years	-350 to -330 €/tCO ₂
Ecodriving (course + feedback) (FLEAT, 2012)	Costs: € 300-1,000 Savings: 9.4% per year	0.1 - 0.2 years	-390 to -350 €/tCO ₂

* Diesel price: € 1.4/l on average in the EU28 (EEA, 2014b) incl. taxes and duties, mileage: 130,000 km/yr, Baseline vehicle 31 l/100 km, discount rate : 7%, vehicle lifetime: 4 to 8 years.

** Marginal abatement cost from the user perspective, so including taxes.



Limiting speeds will also have mostly negative abatement costs, as there are no additional costs; according to TML et al., (2013) speed limiters have had no significant impact on travel time. In addition to fuel savings, this measure **reduces administrative costs of traffic fines and accidents** (CE Delft, 2014) and **reduces maintenance costs** (less wear and tear of tyres and engines) (TML et al., 2013). Furthermore, eco-driving also reduces maintenance costs due to **fewer flat tyres** and it **reduces traffic noise** (CE Delft, 2012).

CASE STUDY: Drive Me Challenge - TNT Express	Head Quarters: Netherlands
<i>One of the world's largest express delivery companies with over 25,000 road vehicles</i>	
Implemented measure:	
<ul style="list-style-type: none"> – Eco-driving training (aiming at 100% of the drivers trained) with monitoring and feedback. – Drive Me Challenge - an annual international competition in which delivery van drivers of TNT and sub-contractors compete with each other on fuel efficiency, safety and speed, while delivering and picking up packages on a circuit. The winners of the national Drive Me Challenges compete in the final international Drive Me Challenge (TNT express, 2013). 	
Results	
<ul style="list-style-type: none"> – Eco-driving training is applied throughout the entire company. TNT Skypak (Greece) participated in a public monitoring scheme (FLEAT) with 140 delivery vans. The results showed short-term benefits of 16% fuel saving during the training day (FLEAT, 2010b). – The long-term benefits (incl. monitoring and feedback) were 5%. These results indicated the importance of motivating employees to continue with eco-driving. According to TNT their internal competition “has proved a popular way to support our fuel efficiency efforts” (TNT Express, 2013). In addition to the reduced fuel consumption, eco-driving resulted in lower stress levels of drivers, due to - surprisingly for them - the average speed increasing rather than decreasing (FLEAT, 2010b). 	
Costs	
No cost figures reported publicly. However, with the FLEAT monitoring of the eco-driving course and feedback of TNT Skypak (Greece) a rough estimation can be made. With average diesel costs of 1.4 €/l (incl. taxes) in 2014 (EEA, 2014b) and an annual mileage of nearly 34,000 km per van, the fuel savings of 5.2% per year result in:	
<ul style="list-style-type: none"> – A payback period of 0.8 year (costs of € 300) to 2.6 years (costs of € 1,000). – Abatement costs of -€ 158 to -€ 55/tonne CO₂ with an average lifetime of 8 years. 	

3.3.4 Logistics and modal shift

<p>Main benefit: Reduces fuel consumption/CO₂ emissions per tonne-kilometre or TEU-kilometre. Increased logistical efficiency can reduce CO₂ emission by 4-20%.</p> <p>Co-benefits: Lower transport costs, lower air polluting emissions and noise emissions, less congestion.</p> <p>Possible disadvantages: Possibly longer delivery times and extra trans-shipment costs (for modal shift). For modal shift to inland waterways, air polluting emissions might increase.</p> <p>Lessons learned: Collaboration among shippers and among carriers, and between carriers and shippers, increases the possibilities for modal shift and increased logistical efficiency.</p>
--

Description of the measure and reduction potential

For transport and shipping companies, optimisation of transport logistics is an important mechanism to minimise transport costs, and also to reduce CO₂ and other transport emissions. Ultimately, efficient transport logistics minimises the fuel consumption and CO₂ emissions per delivered good (expressed in, for example, CO₂ emissions per tonne-kilometre).



Figure 8 gives an overview of several types of measures that can be taken cost effectively and their potential to reduce CO₂ emissions. These measures will not be applicable in all situations, or the measures might have already been taken. Taking this into account, an estimation of the overall potential is given.

Figure 8 Measures and their potential to improve logistical efficiency

Measure type	Potential fuel/ CO ₂ reduction*	Source
Optimising route planning	2-3%	Buck, 2009
Increasing load factor	10-40%	Buck 2009
Relocation of warehouses	5-15%	Buck, 2009
Modal shift from road to inland waterways and rail	20-85%	CE Delft 2011, Buck 2009
Overall potential of improved logistical efficiency	4-20%	PBL, 2014, CE Delft 2015

When transport costs can be reduced, there is a positive incentive for transport companies to optimise their logistics. However, solutions for optimisation are not always trivial and the applicability is very case specific. For example, modal shift is possible only when infrastructure for rail or inland waterways is present. Extra transshipment may be required, which can be expensive for shorter distances. Also reliability and door-to-door travel times are sometimes worse and can be barriers stopping shippers from choosing non-road transport modes.

Increasing the load factor and/or modal shift often requires good co-operation between several actors. Co-operation between shippers (producers) and/or receiving parties (e.g. supermarkets) offers the opportunity to increase transport volumes. Load from/to certain destinations can be combined and the share of empty vehicles can be reduced by rearranging return loads. The increased transport volumes also offer the opportunity to apply more efficient vehicles or to shift, for example, from road to inland waterways. Co-operation between carriers increases both the transport volumes and the vehicle stock. A larger vehicle stock facilitates a more efficient match between vehicle types and shipments (PBL, 2014).

Intelligent transport systems (ITS) and other ICT applications are important instruments for facilitating efficient logistics. Instruments range from travel planning systems (e.g. also taking into account actual travel information), and transport and warehouse management systems for individual carriers and shippers; to the development of national logistics platforms that share information between the different actors in the logistics chain.

To share experiences among carriers and shippers in optimising logistics efficiency, there are several programmes such as Ecostars (UK and other EU countries), Lean and Green (The Netherlands and other EU countries) and Smartway (US). These programmes help to monitor fuel reduction and facilitate the sharing of successful reduction strategies.



Monetary costs and savings

The cost of improving logistics efficiency varies, depending on the measures taken. Costs to be taken into account are the costs of ICT applications, warehousing changes, man-hours for monitoring and planning. In practice it appears that investments are often paid back within a reasonable time by savings due to a reduction in kilometres, net transport hours and/or fuel consumption per transported unit (CE Delft, 2015).

In general, modal shift from road to inland waterways and rail can save costs of up to 80% per tonne-kilometre (NEA, 2004). Costs of modal shift to be taken into account are extra costs for transshipment and (non monetary) costs of possibly longer transport times.

In programmes such as Lean and Green (<http://lean-green.nl/en-GB/>), companies voluntarily develop basis action plans for reducing their CO₂ emissions by 20% in 5 years. Many examples within this programme show that improving logistics efficiency often also results in net monetary benefits.

Finally, improved logistics efficiency results in societal benefits, such as a reduced traffic noise, improved road safety, reduced congestion and reduced air pollution. For modal shift to inland waterways, air pollution emissions can also be higher, depending on the ship size and the motor type.

CASE STUDY: Tesco Sets the Pace on Low Carbon and Efficiency

Head Quarter: UK

Tesco is one of the world's leading international retailers and is involved in a wide variety of different markets and sectors. It employs over 450,000 people around the globe. With approximately 1,800 stores across the UK, distribution is a key area of operation for the company (Tesco, 2010)

Implemented measure: Reduction of CO₂ emissions per case (itemised box of goods) delivered by improving logistics efficiency and modal shift. Specific measures taken by Tesco (Tesco, 2010):

- Establishing a baseline from which improvements could be monitored.
- Tesco updated its warehouse management system, and combined this with its transport planning system to maximise both cage and trailer fill.
- Tesco has replaced a significant number of road movements with train and barge journeys.
- Increasing the use of double deck trailers (capacity of 75 cages compared to 45 in conventional trailers).
- Reduction of the level of empty running by undertaking 55,432 supplier backloads in 2007. After delivering to a store, the vehicle calls into a Tesco supplier on the journey back to collect a load bound for the distribution centre.
- Relocation and reduction of the amount of distribution centres.

Results (Tesco ,2010)

- Saving 3.2 million road miles and 2.4 ktonne CO₂ per year (54%) due to modal shift from road to rail on the link Daventry - Grangemouth. Saving 0.26 million road miles and 330 tonnes CO₂ per year (ca. 90%) due to modal shift from truck to barge for wine transport.
- Saving 0.76 million road miles and 948 tonnes CO₂ per year (20-30% reduction on these trips) by increasing the use of double deck trailers.
- Reduction of 2.6 million road miles and 3.59 ktonnes CO₂ due to backloading.
- Saving 2.2 million road miles and 2.9 ktonnes CO₂ due to the new warehousing strategy.
- Overall reduction of the carbon footprint by 10% in 2007.
- The reduction in truck mileage also reduces congestion, noise and air pollution on these tracks.



Costs

Costs numbers are not provided in the Tesco case description. However on a yearly basis 3.8 million litres of fuel have been saved. With 2014 EU average diesel costs of 1,4 €/l (incl. taxes and duties) this results in savings of € 5.3 million per year. It's unknown how the fuel savings relate to investment costs.





References

ACEA, 2012

Statistics: Vehicles in use

Available at: <http://www.acea.be/statistics/tag/category/vehicles-in-use>

Accessed on December 24th 2014

AEA, 2012

A review of the efficiency and cost assumptions for road transport vehicles to 2050

Didcot : AEA Technology plc, 2012

Available at: <http://www.ricardo-aea.com/cms/assets/Documents-for-Insight-pages/8.-Review-of-cost-and-efficiency.pdf>

Accessed on December 24th 2014

AEA et al., 2010

Ian Skinner (AEA Associate); Huib van Essen (CE Delft); Richard Smokers (TNO); Nikolas Hill (AEA)

EU Transport GHG: Routes to 2050? : Towards the decarbonisation of the EU's transport sector by 2050

London : AEA, 2010

British Gas, 2014

Press release: British Gas orders 100 Nissan e-NV200 vans following successful pilot

Available at:

<https://britishgas.presscentre.com/Press-releases/British-Gas-orders-100-Nissan-e-NV200-vans-following-successful-pilot-440.aspx>

Buck et al., 2009

INTERACTION, Reducing energy use in freight transportation, Final report

Buck Consultants International et al.

Available at:

http://ec.europa.eu/energy/intelligent/projects/sites/iee-projects/files/projects/documents/interaction_final_report.pdf

CE & Ricardo-AEA, 2013

An Economic assessment of low carbon vehicles

Cambridge ; London : Cambridge Economics (CE) ; Ricardo-AEA, 2013

Available at:

<http://europeanclimate.org/documents/Cars-Economic-assessment-vehicles-FINAL.pdf>

CBS, 2013

Telewerken kan bij zes op de tien bedrijven

Webmagazine CBS

Available at: <http://www.cbs.nl/nl-NL/menu/themas/bedrijven/publicaties/artikelen/archief/2013/2013-3881-wm.htm>

Accessed on January 13th 2015

CBS Statline, 2014

Verkeersprestaties personenauto's; eigendom, brandstof, gewicht, leeftijd

Available at: [http://statline.cbs.nl/Statweb/publication/?DM=SLNL&PA=71107ned&D1=0&D2=a&D3=a&D4=0&D5=0&D6=\(1-11\)-l&VW=T](http://statline.cbs.nl/Statweb/publication/?DM=SLNL&PA=71107ned&D1=0&D2=a&D3=a&D4=0&D5=0&D6=(1-11)-l&VW=T)

Accessed on December 24th 2014



CE Delft et al., 2014
CE Delft, TNO en ECN
CO₂-reductie door gedragsverandering in de verkeerssector
CE Delft : Delft, 2014

CE Delft, 2011
STREAM International Freight 2011 : Comparison of various transport modes on a EU scale with the STREAM database
CE Delft ,Delft 2011

CE Delft, 2015
For ODMH (Environmental protection agency Middle-Holland) CE Delft has performed several transport scans for shipper and carrier companies to investigate the potential of more efficient logistics. A 3% reduction in fuel consumption seems to be feasible in all performed scans.

CE Delft, 2013
Opladen voor de toekomst van plug in hybrides en elektrische auto met rangeextender : Een verkenning naar mogelijkheden voor vergroten van het elektrische gebruik
Delft : CE Delft, 2013

CE Delft, 2012
Behavioural Climate Change Mitigation Options. Report Domain Transport
Delft : CE Delft, 2012

CE Delft, 2010a
Effecten van Mobility Mixx voor de BV Nederland
Delft : CE Delft, 2010

CE Delft, 2010b
Speed limiters for vans in Europe : Environmental and safety impacts
Delft : CE Delft, 2010
Available at: http://www.ce.nl/publicatie/speed_limiters_for_vans_in_europe/1046

CE Delft, 2009
EU Transport GHG: Routes to 2050? Operational options and improved vehicle utilisation for all passenger transport mode
available at:<http://www.eutransportghg2050.eu/cms/assets/Operational-options-for-passenger-transport.pdf>
Accessed on December 26th 2014

CE Delft, 2008
Kosten en effecten van beleidsmaatregelen
Delft : CE Delft, 2008

CE Delft, 2007
State-of-the-Art CO₂ en Mobiliteit : Input voor gezamenlijk adviesproject van Raad V&W, VROM-raad en AER
Delft : CE Delft, 2007

CE Delft & Carbon Matters, 2013
Economic and environmental effects of the FQD on crude oil production from tar sands
Delft : CE Delft, 2013



CE Delft & DLR, 2013

Zero emission trucks : An overview of the state-of-the-art technologies and their potential

Delft : CE Delft, 2013

Available at: http://www.ce.nl/publicatie/zero_emission_trucks/1400

CE Delft et al., 2013

Natural gas in transport study : An assessment of different routes

Delft : CE Delft, 2013

CE Delft & ICF, 2011

Impacts of Electric Vehicles

Deliverable 5 : Impact analysis for market uptake scenarios and policy implications

Delft : CE Delft, 2011

CE Delft & TNO, 2012

EU Transport GHG: Routes to 2050 II. Final Report Appendix 8: Cost effectiveness of policies and options for decarbonising transport.

Delft : CE Delft ; TNO, 2012

C.R. England, 2015

Webpage C.R. England, the Company and sustainability

Available at: <http://www.crengland.com/our-company/coporate-responsibility/sustainability>

DfT, 2014

Vehicle Licensing Statistics:2013 : Statistical Release 10 April 2014

S.l. : UK Department for Transport (DfT), 2014

https://www.gov.uk/government/uploads/system/uploads/attachment_data/file/302409/vls-2013.pdf

DUH, 2014

DUH-Dienstwagen-Check: Sieben deutsche Unternehmen fahren beim Klimaschutz mit gutem Beispiel voran, Pressemitteilung 23-07-2014

S.l. : Deutsche Umwelthilfe (DUT), 2014

Available at: [http://www.duh.de/pressemitteilung.html?&tx_ttnews\[tt_news\]=3358](http://www.duh.de/pressemitteilung.html?&tx_ttnews[tt_news]=3358)

Ecofys, 2009

From workplace to anyplace : assessing the opportunities to reduce greenhouse gas emissions with virtual meetings and telecommuting

S.l. : S.n., 2009

EEA, 2014

EEA greenhouse gas - data viewer

Available at: <http://www.eea.europa.eu/data-and-maps/data/data-viewers/greenhouse-gases-viewer>

Accessed on December 22nd 2014

EEA, 2014b

Fuel prices (TERM 021)

Available at: <http://www.eea.europa.eu/data-and-maps/indicators/fuel-prices-and-taxes/assessment-3>

Accessed on December 24th 2014



Element energy, 2012

Ultra Low Emission Vans study, final report

S.l. Element Energy Limited, 2012

Available at: https://www.gov.uk/government/uploads/system/uploads/attachment_data/file/4550/ultra-low-emission-vans-study.pdf

Environment Canada, 2014

National Inventory Report: Greenhouse Gas Sources and Sinks in Canada 1990-2012

Gatineau, (Ca) : Environment Canada, 2014

EPA, 2014

Inventory of U.S. Greenhouse Gas Emissions and Sinks: 1990-2012

Washington DC : US Environmental Protection Agency (EPA), 2014

EC, 2014

EU energy in figures: Statistical pocketbook 2014

Luxembourg : European Commission (EC), 2014

European Union, 2010

Copenhagen Economics

Taxation papers : Company car taxation. Luxembourg : European Union, 2010

FLEAT, 2010a

Intelligent Energy Europe D5.3 Report on monitoring pilot actions, final report.

Available at: http://fleet-eu.org/downloads/wp5_d53_finalreport.pdf

FLEAT, 2010b

Intelligent Energy Europe : Brochure FLEAT

Available at: <http://www.energyagency.at/fileadmin/dam/pdf/publikationen/berichteBroschueren/Endbericht-FLEAT.pdf>

FLEET News, 2015

Fleets in focus : British Gas

Available at: <http://www.fleetnews.co.uk/fleet-management/fleets-in-focus-british-gas/46126/>

FRoSTA, 2013

[FRoSTA's Firmenwagen fahren jetzt CO2 neutral](#) : Blog

Available at: <http://www.frostablog.de/nachhaltigkeit/firmenwagen-jetzt-co2-neutral>

FRoSTA, 2014

[Mehr als 14.000 Liter Benzin und Diesel eingespart!](#) : Blog

Available at: <http://www.frostablog.de/nachhaltigkeit/mehr-als-14-000-litre-benzin-und-diesel-ingespart>

Gareis, 2003

Karsten Gareis

The intensity of telework in 2002 in the EU, Switzerland and the USA

Paper presented at the International Congress Sustainability in the New Economy : Designing a New Work Space, Spain, 2003

GE Capital, 2013a

Key Solutions CO₂ Assessment : CO₂ emissions from company cars across Europe's major markets between 2008 and 2012

London : GE Capital, 2013



GE Capital, 2013b

How to Drive down company car and van CO₂ emissions

London : GE Capital, 2013b

Greenbiz.com, 2010

GE To Boost Electric Vehicle Fleet By 25K : Press release November 11, 2010

Available at: http://www.greenbiz.com/news/2010/11/11/ge-boost-electric-vehicle-fleet-25k?utm_source=GreenBuzz&utm_campaign=c5e4489fdd-GreenBuzz-2010-11-15&utm_medium=email#ixzz15MosUCYr

Green Car Report, 2013

GE Adds Natural-Gas Vehicles To Its Electric And Alternate-Fuels Fleet. Press release Jan. 9, 2013

http://www.greencarreports.com/news/1081557_ge-adds-natural-gas-vehicles-to-its-electric-and-alternate-fuels-fleet

ICCT, 2014

Driving electrification : A global comparison of fiscal incentive policy for electric vehicles

S.l. : The International Transport Council (ICCT), 2014

IEA, 2014a

CO₂ emissions from fuel combustion : Highlights, 2014 edition

Paris : International Energy Agency (IEA), 2014

IEA, 2014b

2014 Key world energy statistics

Paris : International Energy Agency (IEA), 2014

ING, 2011

R. Luman (ING)

Wegtransport uitgedaagd tot hogere vrachtprijs; vrachtvolumes herstellen, strategische keuzes noodzakelijk. Sectorvisie wegtransport

S.l. : ING (BE), 2011

IPCC, 2014a

Summary for Policymakers

In: Climate Change 2013 : The Physical Science Basis. Contribution of Working Group I to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change

Cambridge (UK) : Cambridge University Press, 2014

IPCC, 2014b

Summary for Policymakers. In: Climate Change 2014: Mitigation of Climate Change. Contribution of Working Group III to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change

Cambridge (UK) : Cambridge University Press, 2014

IRU, 2014

IRU Observations on the European Commission Strategy for Reducing Heavy Vehicles Fuel Consumption and CO₂ Emissions

Brussels : International Road Transport Union (IRU), 2014

Available at: http://www.iru.org/cms-filesystem-action/policies/sustainable_development/br3080finalen.pdf



IvDM, 2015

Factsheet elektrische vrachtwagen

Available at: <http://www.truckvandetoeekomst.nl/thema/brandstoffen-aandrijving/elektrische-aandrijving/>

JRC and IET, 2014

Well-to-Wheels analysis of future automotive fuels and powertrains in the European context

Luxembourg : Publications Office of the European Union, 2014

Knight, 2010

Cheryl Knight

Kone Takes Fleet Eco-efficiency to a higher Level; Cover story

Available at: http://www.fleetfinancials.com/fc_resources/ff0310kone.pdf

Accessed on December 26th 2014

KONE, 2012

More cars, less emissions: eco-safe driving brings results

Available at: <http://www.kone.com/en/responsibility-2012/cases/case-more-cars-less-emissions-eco-safe-driving-brings-results/>

Accessed on December 26th 2014

Kurani et al., 2013

Kenneth S. Kurani, Tai Stillwater, Matt Jones, Nicolette Caperello Ecodrive I-80: A large sample fuel economy feedback field test

Davis : University of California, (Institute of Transportation Studies (ITS). 2013

McKinsey & Company, 2009

Roads towards a low carbon future: reducing CO₂ emissions from passenger vehicles in the global road transportation system

New York : McKinsey & Company, 2009

MB Tech, 2010

Trend Monitor 2010. Light Commercial Vehicle of the Future : Optimising Total Cost of Ownership considering future drive concepts and business conditions

Sindelfingen : MB Tech, 2010

NEA, 2004

Factorkosten van het goederenvervoer: een analyse van de ontwikkeling in de tijd

Rijswijk : NEA, 2004

Nissan, 2015

Webpage : De geheel nieuwe volledig elektrische, geheel flexibele e-NV200

Available at: <http://www.nissan.nl/NL/nl/vehicle/electric-vehicles/e-nv200.html>

Peters and Den Dulk, 2003

Pascal Peters and Laura Den Dulk

Cross cultural differences in managers' support for home-based telework : a theoretical elaboration

In : International Journal of Cross Cultural Management, Vol. 3, No.3 (2003); p. 329-346



PBL, 2014

Options for the road freight sector to meet long term climate targets

The Hague : Netherlands Environmental Assessment Agency (PBL), 2014

available at: <http://abstracts.aetransport.org/paper/index/id/4224/confid/19>

Accessed on January 13nd 2014

PRNewswire, 2014

C.R. England Receives US EPA 2014 SmartWay Excellence Award, news release, oct. 8, 2014

Available at: <http://www.prnewswire.com/news-releases/cr-england-receives-us-epa-2014-smartway-excellence-award-278487821.html>

RAI, 2013

Analyse autoverkopen 2012

Amsterdam : RAI Vereniging, 2012

SmartWay, 2015

Webpage: SmartWay Carrier Performance Rankings

Available at: <http://www.epa.gov/smartway/forpartners/performance.htm>

SULTAN, 2012

EU Transport GHG : Routes to 2050. Illustrative Scenarios tool

Available at: <http://www.eutransportghg2050.eu/cms/illustrative-scenarios-tool/>

Accessed on December 22nd 2014

Sustel, 2004

Is teleworking sustainable? : An analysis of its economic, environmental and social impacts

S.l. : Sustainable Teleworking (Sustel), EU project, 2004

T&E 2011

Webpage: What we do - Cars and CO₂ - Background

available at: <http://www.transportenvironment.org/what-we-do/cars-and-co2/background>

Accessed December 24th 2014

Tesco 2010

Freight Best Practice series (FBP 1094) : Tesco Sets the Pace on Low Carbon and Efficiency

Colchester : Low Carbon Freight Dividend, 2010

Tiax, 2011

European Union Greenhouse Gas Reduction Potential for Heavy-Duty Vehicles

Cupertino : TIAx, 2011

TML et al., 2013

Ex-post evaluation of Directive 92/6/EEC on the installation and use of speed limitation devices for certain categories of motor vehicles in the Community, as amended by Directive 2002/85/EC

Brussels : European Commission (EC), 2013

TNO et al., 2014

Verzamelde kennisnotities t.b.v. de visie duurzame brandstoffenmix

Delft ; Petten : TNO, CE Delft and ECN, 2014



TNO, 2013

Praktijkverbruik van zakelijke personenauto's en plug-in voertuigen
Delft : TNO, 2013

TNO et al., 2011

Support for the revision of Regulation (EC) No 443/2009 on CO₂ emissions from cars, final report
Delft : TNO, 2011

TNO et al., 2006

Review and analysis of the reduction potential and costs of technological and other measures to reduce CO₂ emissions from Delft, passenger cars
TNO : Delft, 2006

TNT, 2013

TNT Express holds international eco-driving competition in the Netherlands, press release October 11, 2013

Available at: <http://www.tnt.com/corporate/en/data/press/2013/10/tnt-express-holds-international-eco-driving-competition-in-the-netherlands.html>

TREMOVE, 2012

TREMOVE economic transport and emissions model, version 3.3.2
Leuven : Transport & Mobility Leuven (TML), 2012

Verbruiken.nl, 2014

Webpage : Nissan e-NV200 verbruik en prijs

Available at: <http://www.verbruiken.nl/elektrische-autos/nissan-e-nv200>

zerijden.nl, 2015

Webpage: Overzicht Elektrische auto's

Available at: <http://zerijden.nl/elektrische-autos/>



Annex A Estimations company cars in the EU28

To estimate the number of company cars in the EU28 car fleet and their share in the total EU28 emissions from passenger cars, a ‘back of the envelope’ calculation has been made. The assumptions and results are summarised in Table 7.

Table 7 Share of company cars in total passenger car emissions in the EU28

EU28, 2012	Value	Note/Source
Estimating the number of company cars in the EU28		
New company car sales in 18 EU countries in 2008	5,700,000	European Union (2010)
Total number of company cars in the EU 18 fleet	22,800,000	For an average lifetime of 4 years (5,700,000 * 4=22,800,000)
Total number of cars in in the EU 18 fleet	196,400,000	ACEA (2012)
Share of company cars in total EU 18 fleet	12%	22,800,000/196,400,000=12%
Total number of cars in the EU28 fleet	285,000,000	ACEA (2012)
Number of company cars in the EU28 fleet	33,100,000	Estimated with the same share of company cars in the EU18 (12%): 285,000,000*12% = 33,100,000
Estimating the emissions of the EU28 company car fleet		
Total GHG emissions in EU28 from cars in Mt CO ₂ eq. (2012)	528	EEA (2014)
Annual mileage of a a) company car & b) average car in km	a) 24,000 & b) 13,000	CBS (2014); based on Dutch statistics, which is only used for the relative difference in mileage, not for the absolute mileage.
CO ₂ efficiency of a a) company car & b) average car in g/km	a) 186 & b) 200	T&E (2013) for company car TREMOVE (2012) for an average car
CO ₂ emissions in Mt for a) company cars & b) average cars when applying the assumptions above	a) 148 b) 661 total: 809	a 33,100,000 [# of company cars] * 24,000 [annual mileage company car] * 186 g/km = 148 Mt b (285,000,000 - 33,100,000) [# of private cars] * 13,000 [annual mileage company car] * 200 g/km = 661 Mt
Share of company cars in total car emissions	18%	=148 [estimated company car emissions] / 809 [estimated total car emissions]; see previous row
Mt CO ₂ of company cars	97	528 [actual total car emissions in the EU] * 18% [share of company cars in total car emissions].





Annex B Overview and explanation of technical measures for freight transport vehicles

This annex first describes the technical measures to reduce fuel consumption of conventional trucks (and larger vans) and the investment costs of these technologies. It then provides an overview of the technologies available for (smaller) vans.

Aerodynamics

After accounting for the energy that is lost to heat during the combustion process, aerodynamic resistance typically represents the largest drag force for vehicles operating at highway speeds (i.e. at 80 kph). Therefore, reducing the aerodynamic drag of trucks improves fuel efficiency. These benefits are largest for vehicles that travel long distances at high speeds (AEA, 2011). Several technologies can be implemented to reduce aerodynamic drag (illustrating pictures can be found in Figure 9):

- *Trailer rear end taper*: a trailer rear end taper is a tapered extension of the back end of a trailer which reduces wake and drag resistance (TMA, 2007).
- *Boat tail*: a boat tail is a tapered extension of the trailer (longer than a trailer rear end taper) to reduce the wind resistance from the trailer (TW, 2009).
- *Trailer skirts*: These are vertical plates that are placed in the longitudinal direction of the truck covering the open spaces. This can reduce wind resistance as it prevents wind flow from going under the truck where the flow would run into many disturbances (e.g. storage boxes, axles and the wheels) (TU Delft, 2008).
- *Cab side extensions or gap fairings*: Cab side extenders bridge the gap between the cab and the body of the truck; they are located at the sides of the rear cab edges (AEA, 2011).
- *Full gap fairing*: are additional add-ons bridging the gap between the cab and the body of the truck (ibid.).
- *Roof deflector*: this is a three-dimensional moulding on the cab roof that allows the wind flow a smooth transition from the cab roof to the trailer (ibid.).
- *Streamlining*: adjusting the shapes of the vehicle to reduce air resistance.

Figure 9 Aerodynamic technologies



Trailer rear end taper



Boat tail



Trailer skirts



Cab side extenders



Full gap fairing



Roof deflector

Light-weighting

Reducing the weight of vehicles can reduce energy consumption and therefore reduce the amount of CO₂ that is emitted (IFEU, 2003). For the on-road freight sector, weight reduction is typically achieved by substituting relatively heavy materials for lighter aluminum alloys (AEA, 2011).

Tyres

Technologies in this category are mainly aimed at reducing the rolling resistance of tyres (AEA, 2011):

- *Low rolling resistance tyres*; these are tyres that are optimised to provide the lowest possible level of rolling resistance (ibid.). When combining the profile of these tyres with aluminium wheels, the weight of the tyres is reduced, which further reduces fuel consumption.
- *Automatic tyre inflation*: low tyre pressure results in larger rolling resistance, which increases fuel consumption (ECLA, 2010). An automatic tyre inflation system, which can either be placed on the vehicle itself or on the trailer, automatically inflates tyres when pressure is low (AEA, 2011; TIAX, 2011). It should be mentioned that this is relatively expensive in contrast to a tyre pressure monitoring system (TPMS), which also measures the pressure of the tyres and provides this information to the driver, but cannot inflate the tyres automatically. This information system was included in the questionnaires as well, as it is argued by some parties to be very cost effective (Doran Manufacturing, 2011).

Transmission and driveline

Friction in the transmission and other driveline components reduces vehicle efficiency. By reducing this friction, less fuel is consumed, and less carbon is emitted. This can be accomplished by:

- *Low friction plastics for the key components*: by replacing metals with low friction plastics, friction between moving parts is reduced, which in turn improves efficiency.
Aggressive shift logic and early lockup: technologies that optimise fuel efficiency by altering the shift schedule where appropriate. It for example ensures that the transmission is automatically kept in a lower gear when the car goes uphill.
Increased transmission gears: instead of a five-speed (automatic) transmission, six-, seven- and eight- speed transmission systems can be applied to the vehicle to drive more efficiently.

Engine efficiency

Technical developments constantly improve engine efficiency. Adopting measures to increase the efficiency of engines improves the overall fuel efficiency of a vehicle. Two types of engines have been distinguished, one for the regional and urban segment and one for the long haul segment. The former is an advanced 6-9 l engine with 220-230 bar cylinder pressure, 3,000 bar fuel injection and a peak thermal efficiency of 46 to 49%, whereas the latter comprises of an advanced 11-15 l engine with 240 bar cylinder



pressure, 4,000 bar supercritical atomisation fuel injection and a peak thermal efficiency of 51 to 53%¹⁴.

Hybridisation

Hybrid systems for HGVs aim to reduce unnecessary engine idling when the vehicle is stationary (by means of a start/stop hybrid) and/or to recover energy from braking, which is stored and then used to help accelerate the vehicle (AEA, 2011). Hybrid technologies will have the largest benefits for vehicles operating in urban areas, as these vehicles typically have transient driving patterns (ibid.). Two hybrids are distinguished by TIAX (2011) for the market segments that are the focus of this study:

- *(Generation II) Dual-mode hybrid (long haul and regional haul)*: The dual mode hybrid automatically switches the engine off at idle. When accelerating from stop, the diesel engine and electric motor blend their power until the truck has reached highway speed, from there the diesel engine takes over, although the electric motor can still assist when going up a steep hill, for example. In addition, the electric motor is used to power all accessories that would normally run with the diesel engine, such as the power steering or air compressor. Its batteries can be loaded either from storing energy that is released when braking or the diesel engine can work as a generator (ArvinMeritor, 2008).
- *Parallel hybrid*: A parallel hybrid turns the engine off at idle and uses the electric motor to drive when starting. Thereafter, the diesel engine is started as well; both power sources can work in parallel. The electric motor also works as a generator to deliver energy that is recovered from braking to the battery pack (Volvo trucks global, 2012). As vehicles driving in urban areas need to brake often, the parallel hybrid is typically advantageous for this group of vehicles (TIAX, 2011).

The investment costs of the measures described above are summarised in Table 8.

¹⁴ Further technical specifications of both engines can be found in TIAX (2011).



Table 8 Investment costs of technical measures for conventional trucks

Technology		TIAX Technology Cost (2010€)					
		Service	Urban Delivery	Municipal Utility	Regional Delivery	Long Haul	Construction
Aerodynamics	Aft box taper		384				
	Boat tail				1,345	1,345	
	Box skirts		576				
	Cab side extension or cab/box gap fairings		442				
	Full gap fairing				961	961	
	Full skirts				2,306	2,306	
	Roof deflector		500				
	Streamlining	77					
Lightweighting	Material substitution	721	3,666	2,306	2,283	2,283	346
Tires and Wheels	Automatic tire inflation on vehicle/tractor				3,459	3,459	3,459
	Automatic tire inflation on trailer				269	269	
	Low rolling resistance tires	8		231			
	Low rolling resistance wide-base single tires		346		346	346	346
Transmission and Driveline	Aggressive shift logic and early lockup	46		77			
	Increased transmission gears	826		1,806			
	Transmission friction reduction	192		192	192	192	192
Engine Efficiency	Improved diesel engine	1,153	3,728	3,728	3,728	10,415	3,728
Hybridization	Dual-mode hybrid	22,290			17,871	21,137	
	Parallel hybrid		14,604				14,604
	Parallel hydraulic hybrid			23,059			
	Series hybrid						

Source: TIAX (2011).



Table 9 summarises the reduction potential and costs of technologies to reduce emissions for conventional vans.

Table 9 Reduction potential and costs of technical measures for conventional vans

Technology options for N1 diesel cars		Class I					Class II					Class III				
Description		CO2 red. [%]	Costs [Euro]	Attribution to CO2 [%]	Attributable Costs [Euro]	Weight [kg]	CO2 red. [%]	Costs [Euro]	Attribution to CO2 [%]	Attributable Costs [Euro]	Weight [kg]	CO2 red. [%]	Costs [Euro]	Attribution to CO2 [%]	Attributable Costs [Euro]	Weight [kg]
Engine	Reduced engine friction losses	3.0	40	100%	40		4.0	50	100%	50		5.0	60	100%	60	
	Mild downsizing	2.0	120	100%	120		2.0	150	100%	150		2.0	180	100%	180	
	Medium downsizing	4.0	160	100%	160		4.0	200	100%	200		4.0	240	100%	240	
	Optimised cooling circuit	1.5	35	100%	35		1.5	35	100%	35		1.5	35	100%	35	
	Advanced cooling circuit- electric water pump	3.0	120	100%	120		3.0	120	100%	120		3.0	120	100%	120	
	Exhaust heat recovery						1.5	45	100%	45		1.5	45	100%	45	
Transmission	6 speed manual/automatic gearbox															
	Piloted gearbox	4.0	300	100%	300		4.0	350	100%	350		4.0	400	100%	400	
Hybrid	Start-stop function	3.0	180	100%	180		3.0	200	100%	200		3.0	220	100%	220	
	Start-stop + regenerative braking	6.0	475	100%	475		6.0	550	100%	550		6.0	813	100%	812.5	
	Mild hybrid (motor assist)	10.0	1200	100%	1200		10.0	1600	100%	1600		10.0	2600	100%	2600	
	Full hybrid (electric drive capability)	18.0	2800	100%	2800		18.0	3500	100%	3500		18.0	5460	100%	5460	
Body	Improved aerodynamic efficiency	1.5	75	100%	75		1.5	75	100%	75		1.5	75	100%	75	
	Mild weight reduction	1.0	23	100%	23	-15	1.0	31	100%	31	-20	1.0	38	100%	38	-25
	Medium weight reduction	2.4	65	100%	65	-37	2.5	101	100%	101	-49	2.4	136	100%	136	-61
	Strong weight reduction	5.9	231	100%	231	-93	6.3	333	100%	333	-123	5.9	538	100%	538	-152
Other	Low rolling resistance tyres	2.0	25	100%	25		2.0	30	100%	30		2.0	35	100%	35	
	Electrically assisted steering (EPS, EPHS)	3.0	100	100%	100		2.5	100	100%	100		2.0	100	100%	100	
	DeNOx catalyst	0.0	0	100%	0		0.0	0	100%	0		0.0	0	100%	0	
	Particulate trap / filter	1.5	0	100%	0		1.5	0	100%	0		1.5	0	100%	0	

Note: The reduction potential is likely to be an overestimation, as the study is quite old. Hence, the baseline vehicle will have relatively higher emissions per kilometre than the average van currently sold.

Source: TNO, 2006.

